

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/3/11	


APPROVED: _____


DATE: _____ TITLE: _____

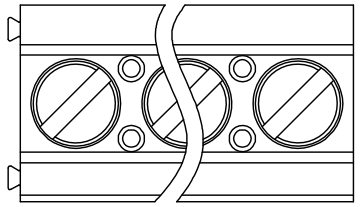

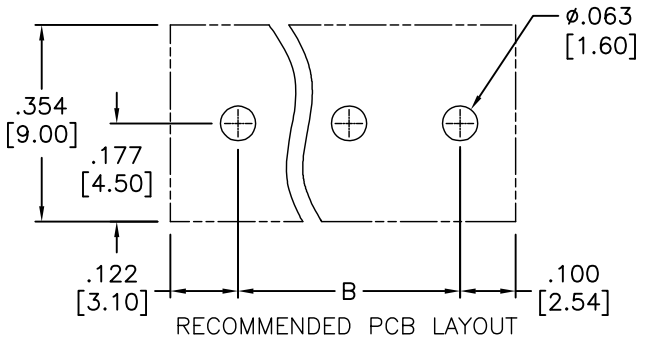

RECOMMENDED PCB LAYOUT

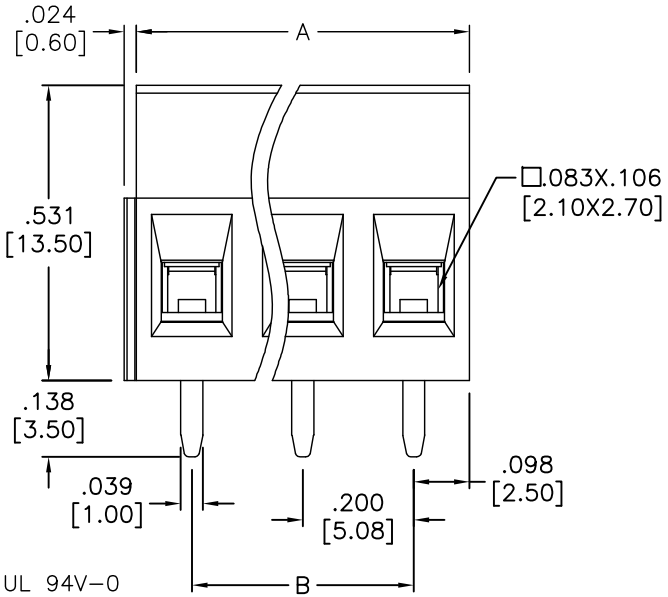

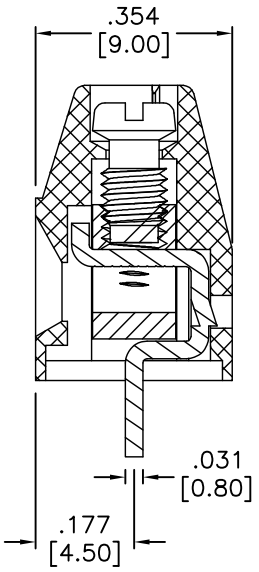

	Tolerance
2–6P	±.006 [0.15]
7–12P	±.010 [0.25]
13–16P	±.014 [0.35]
17–24P	±.016 [0.40]

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Contact: Brass, Tin plated
Clamp: Brass, Nikel plated
Screw: M3 Steel, Zinc plated
Electrical:
Operation voltage: 300 VAC max
Current rating: 16 Amps
Torque (Lb–In): 3.5
Wire Range: 0.5–1.5mm²
Solid wire (AWG): 12–28
Stranded wire (AWG): 12–28
Withstanding Voltage: 1.6KV
Wire strip length: 6–7mm
Environmental:
Operating temperature: –40°C to +115°C
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24
A = .200 [5.08] x No. of Positions
B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/3/11
CHECKED	AH	8/3/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE
.200" [5.08] PITCH, TERMINAL BLOCK

SIZE	PART NO.	REV.
X	EBAF-XX-D	-

REF: S00007T | SCALE: NTS | SHEET 1 OF 1