

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/3/12	
A		REVISED DIM.	5/15/12	

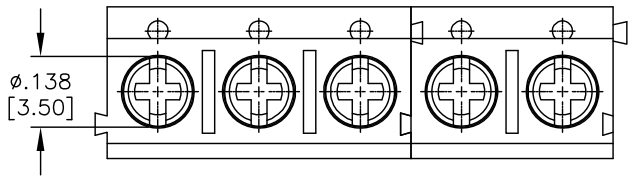

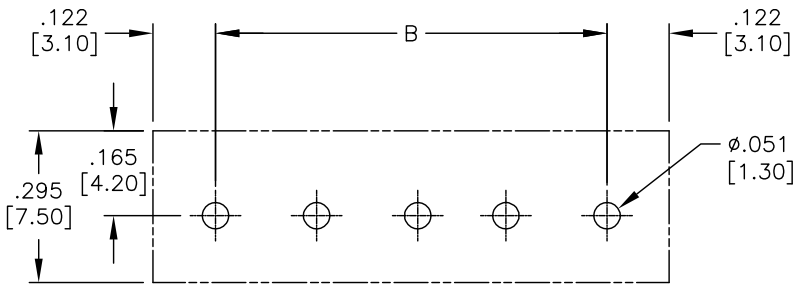

RECOMMENDED PCB LAYOUT

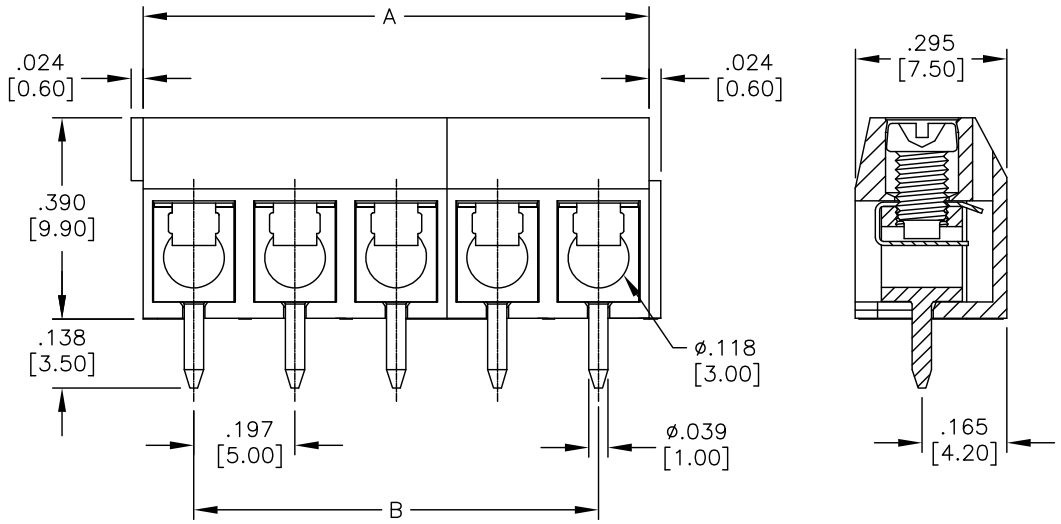

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Blue
Screw: M2.6, Steel, Zinc plated.
Contact: Brass, Tin plated.
Wire guard: Stainless steel.
Electrical:
Operation voltage: 300 VAC
Current rating: 15 Amps
Torque (Lb–In): 2.6
Wire Range: 0.75–1.5mm²
Solid wire (AWG): 14–22
Stranded wire (AWG): 14–22
Withstanding Voltage: 1.6KV
Wire strip length: 6–7mm
Environmental:
Operating temperature: –30°C to +105°C
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 2 thru 24
A = .197 [5.00] X No. of Positions
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	3/3/12
CHECKED	OC	3/3/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE: EURO BLOCK, .197 [5.00] PITCH

SIZE	PART NO.	REV.
X	EBB-XX-C-BL	A

REF: S00007T | SCALE: NTS | SHEET 1 OF 1