APPROVED: _____

DATE: _____ TITLE:

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/04	
A		REDRAWN	12/16/11	
B		UPDATE DIM.	4/18/19	OW/YC

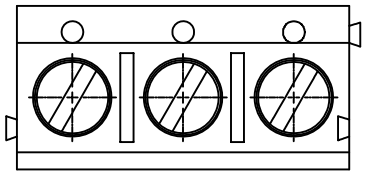

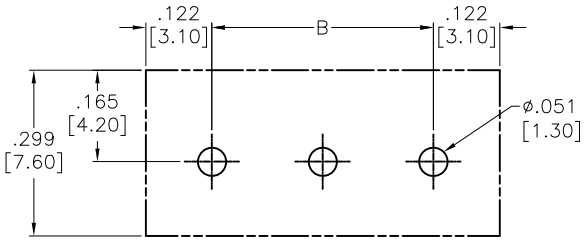

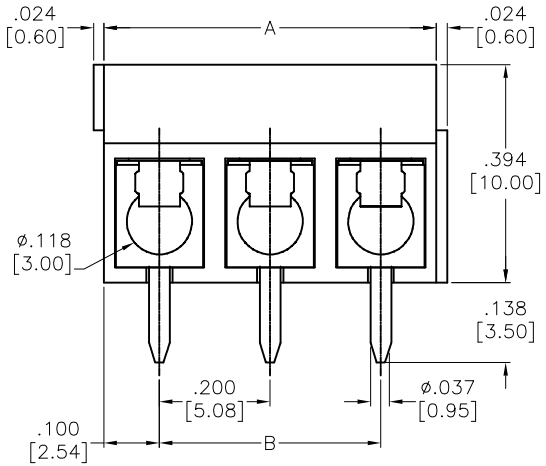

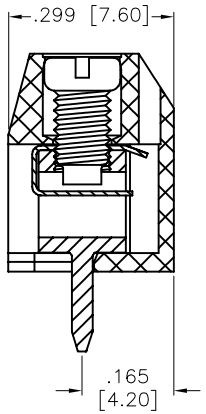

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Wire guard: Stainless Steel
Contact: Brass, Tin plated
Screw: Steel, M2.6, Zinc plated
Electrical:
Voltage rating: 300 VAC
Current rating: 16 A
Withstanding Voltage: 1.6KV
Mechanical:
Solid wire(AWG): 14–22
Stranded wire(AWG): 14–22
Torque(Lb–In): 2.6
Wire strip length(mm): 5–6
Temperature Rating:
Operating temperature: –40°C to +115°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24
A= .200 [5.08] x No. of Positions
B= .200 [5.08] x No. of Spaces

	Dim A	Dim B
2–6P	±.006 [0.15]	±.004 [0.10]
7–12P	±.008 [0.20]	±.008 [0.20]
13–18P	±.012 [0.30]	±.010 [0.25]
19–24P	±.016 [0.40]	±.012 [0.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SLS	3/17/04
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EURO BLOCK, .200 [5.08] PITCH

SIZE	PART NO.	REV.
X	EBB-XX-D	B

REF: S00007T | SCALE: NTS | SHEET 1 OF 1