



APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
D		UPDATE DIP TAIL	5/31/18	HR/TW
E		DIM .160 [4.05] WAS .165 [4.20]	12/3/18	SS
F		UPDATED DIM.	06/26/19	AY/TW

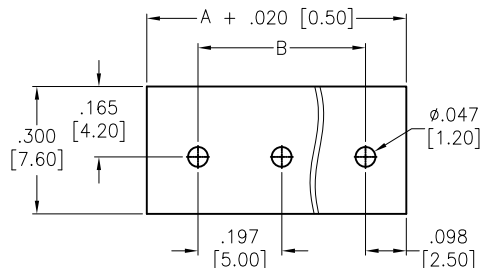

RECOMMENDED PCB LAYOUT

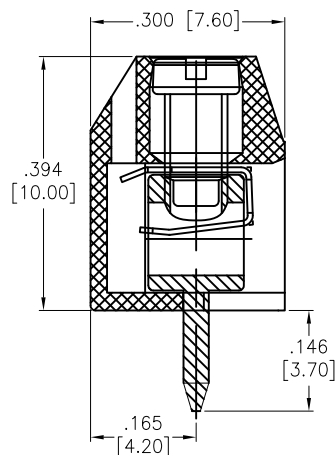

SECTION A-A

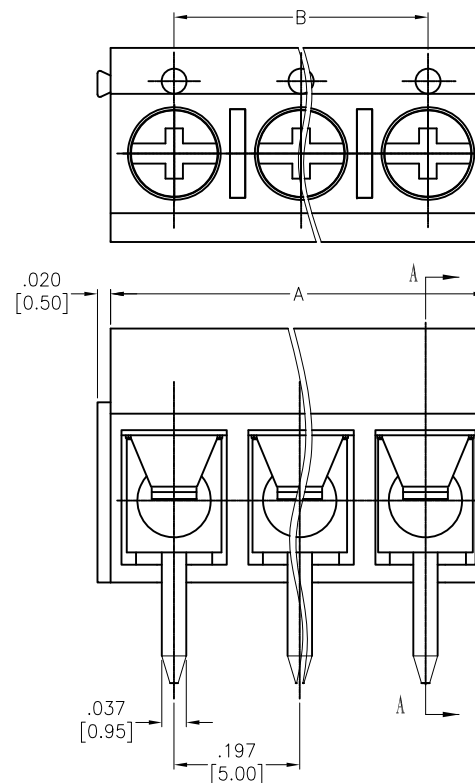

SPECIFICATIONS:

Material:

Insulator: Polyamide, PA46, rated UL 94V-0

Insulator color: Black

Screw: M2.5, Steel, Zinc plated.

Contact: Copper Alloy, Tin plated.

Shrapnel: Stainless Steel

Electrical:

Voltage rating: 300 VAC Max.

Current rating: 15 Amps Max.

Contact resistance: 20 mohms max.

Insulation resistance: 500 Mohms min @ 500 VDC

Withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Torque: 4.0Lb-In

Wire Range: 22-14AWG, 1.5mm²

Strip Length: 4.5-5mm

Temperature Rating:

-40°C to +105°C

Soldering Temperature: 260°C max for 5 Sec. max.

Lead free, RoHS compliant.



Positions: 2 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		[MM]
.X ± .02		
.XX ± .01	.X ± [0.30]	
.XXX ± .010	.XX ± [0.10]	

APPROVALS		DATE
DRAWN	SS	2/24/17
CHECKED	GD	2/24/17
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE EURO BLOCK, .197 [5.00] PITCH, .114" [2.9mm]
TAIL

SIZE X	PART NO. EBBA-XX-C-BK-HT	REV. F
REF: S00046C	SCALE: NTS	SHEET 1 OF 1