




APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/23/14	
A		UPDATE SPEC.	8/17/17	AY
B		UPDATE DRAWING	7/9/19	OW/TW

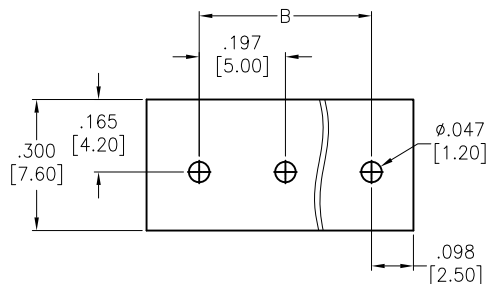

RECOMMENDED PCB LAYOUT

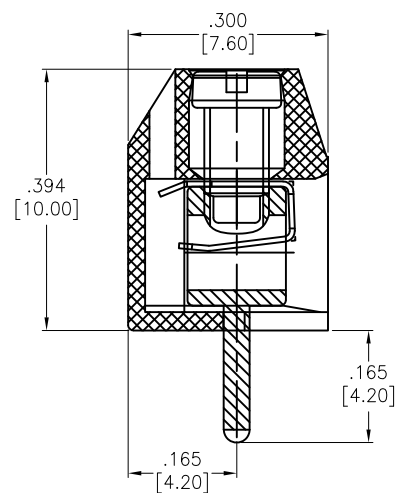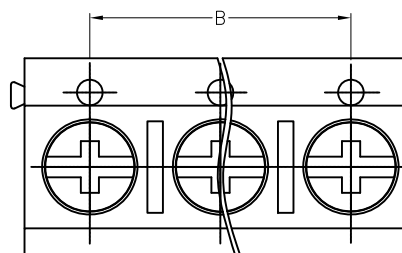

SECTION A-A

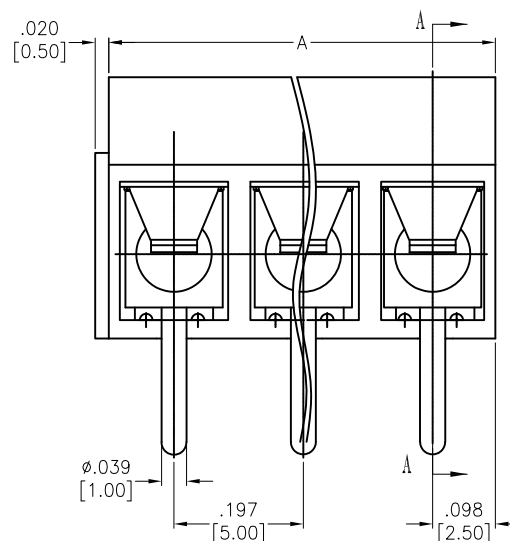

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Blue

Screw: M2.5

Contact: Copper Alloy, Tin plated.

Electrical:

Voltage rating: 250 V

Current rating: 16 A

Withstanding voltage: 1,500 V for 1 minute

Mechanical:

Torque: 0.4N-m max

Wire Range: 22-14AWG

Strip Length: 5-6mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	HR	5/23/14
CHECKED	SY	5/23/14
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
EURO BLOCK, .197 [5.00] PITCH, BLUE COLOR
INSULATOR

SIZE X	PART NO. EBBA-XX-C-BU	REV. B
REF: S00067C	SCALE: NTS	SHEET 1 OF 1