

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/6/16	
A		UPDATE SPEC.	8/17/17	AY
B		UPDATE DRAWING	7/9/19	OW/TW

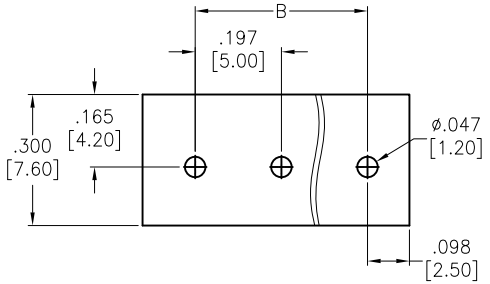


RECOMMENDED PCB LAYOUT

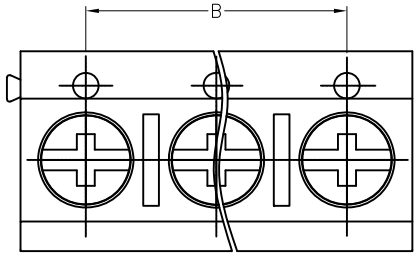

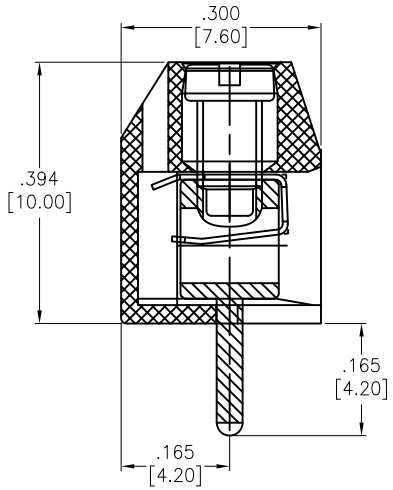

SECTION A–A

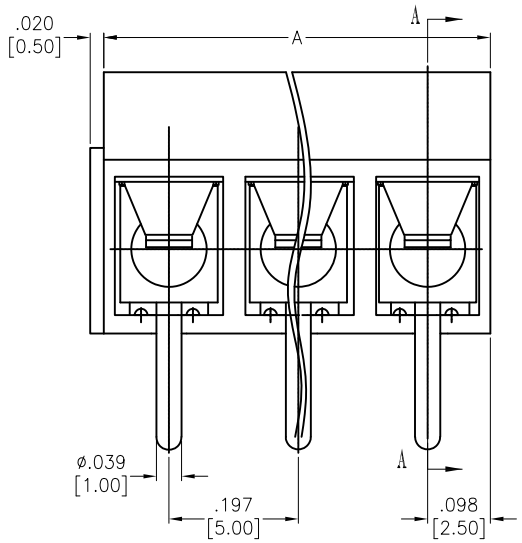

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V–0

Insulator color: Gray

Screw: M2.5

Contact: Copper Alloy, Tin plated.

Electrical:

Voltage rating: 250 V

Current rating: 16 A

Withstanding voltage: 1,500 V for 1 minute

Mechanical:

Torque: 0.4N–m max

Wire Range: 22–14AWG

Strip Length: 5–6mm

Temperature Rating:

Operating temperature: –40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	12/6/16
CHECKED	VT	12/6/16
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EURO BLOCK, .197 [5.00] PITCH

SIZE	PART NO.	REV.
X	EBBA-XX-C-GY	B

REF: S00067C | SCALE: NTS | SHEET 1 OF 1