

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/15/08	
A		REVISED SHAPE	2/12/09	
B		REVISED DIM.	12/1/11	

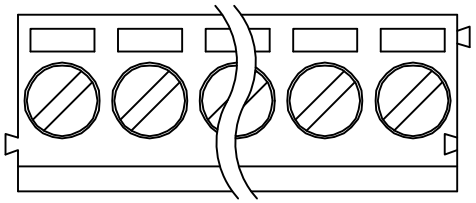

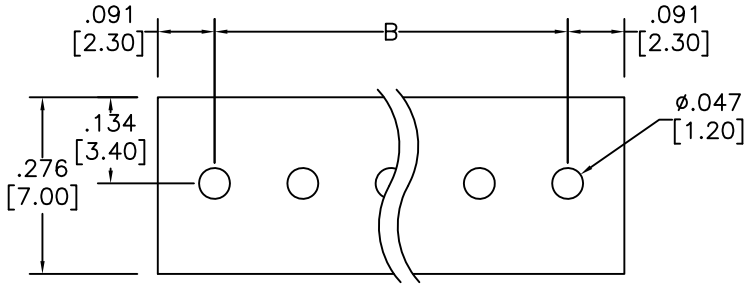

RECOMMENDED PCB LAYOUT

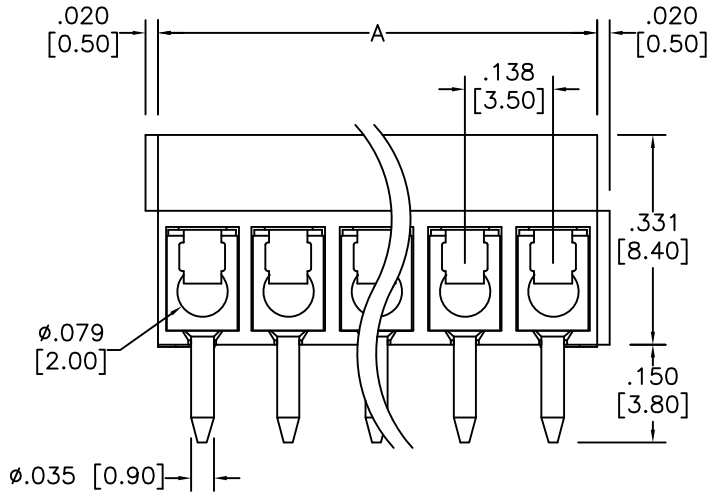

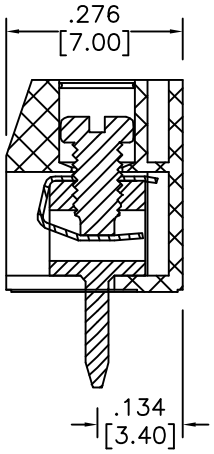

	Dim A	Dim B
2–6P	±.004 [0.10]	±.004 [0.10]
7–12P	±.008 [0.20]	±.006 [0.15]
13–18P	±.012 [0.30]	±.010 [0.25]
19–24P	±.016 [0.40]	±.014 [0.35]

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Black
Screw: M2.0, Steel, Zn plated.
Contact: Brass, Tin plated.
Wire guard: Stainless Steel
Electrical:
Operation voltage: 125 VAC
Current rating: 10 Amps
Mechanical:
Torque (Lb–In): 1.7
Wire Range: 16–26 Awg
Solid wire: 16–26 Awg
Withstanding Voltage: 1.25KV
Environmental:
Operating temperature: –40°C to +115°C
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 2 thru 24
A = .138 [3.50] x No. of Positions
B = .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SLS	1/15/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE: EURO TERMINAL BLOCK, VERTICAL
.138 [3.50] PITCH, PCB TYPE

SIZE	PART NO.	REV.
X	EBC-XX-A	B

REF: S00007T | SCALE: NTS | SHEET 1 OF 1