

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		Released	3/30/06	
A		UPDATE DRAWING	4/12/19	OW/RC1

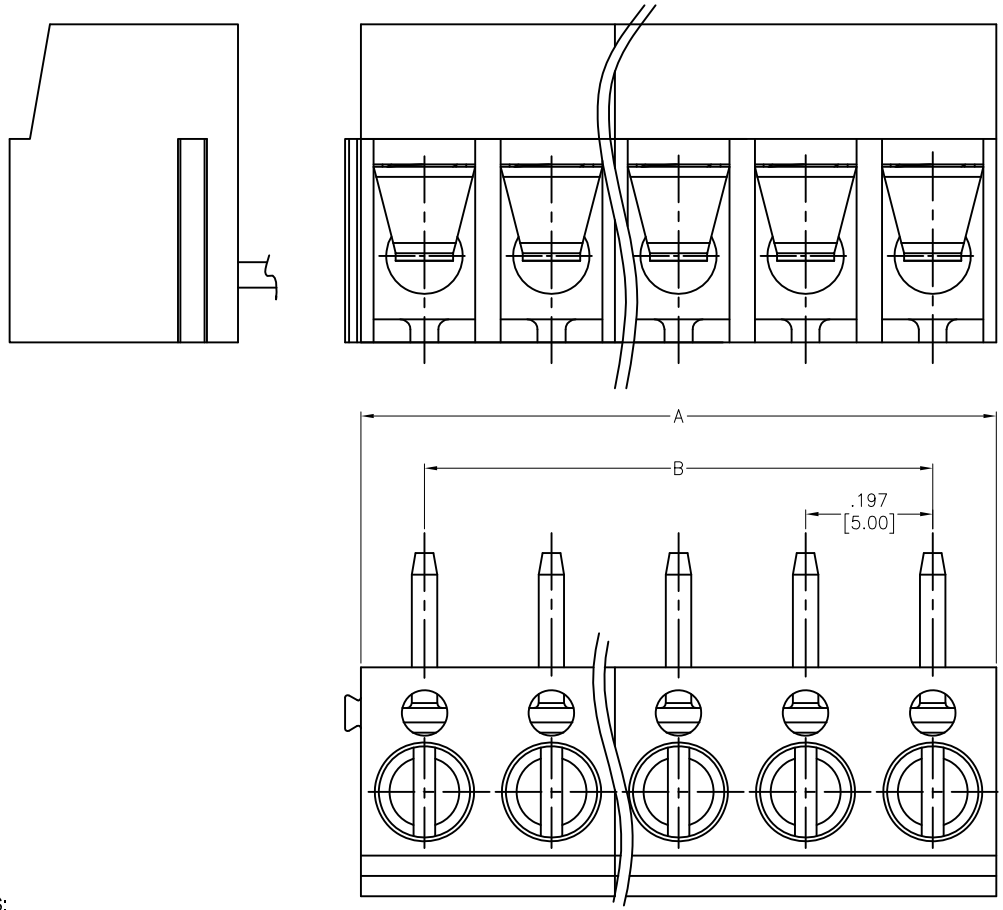

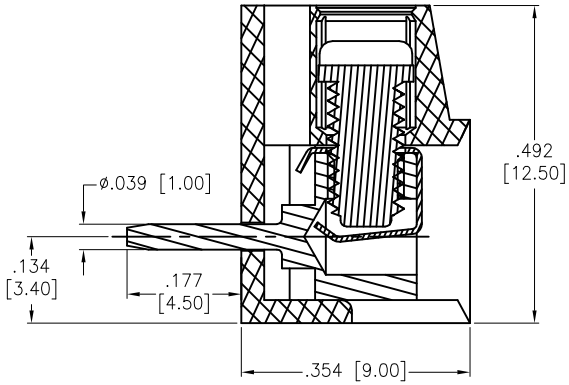

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Black
Screw: Steel, Zinc plated
Contact: Brass, Tin plated
Electrical:
Rating: 300V 15A
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Mechanical:
Wire Range: 14-22AWG,
Torque: 4.0 lbf-in
Temperature Rating:
Operating temperature: -33°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24
A= .197 [5.00] x No. of Positions per Row
B= .197 [5.00] x No. of Space

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LFJ	3/30/06
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EURO BLOCK, .354 HEIGHT RIGHT ANGLE, 5.00mm PITCH

SIZE	PART NO.	REV.
X	EBD-XX-C	A

REF: S00026C | SCALE: NTS | SHEET 1 OF 1