

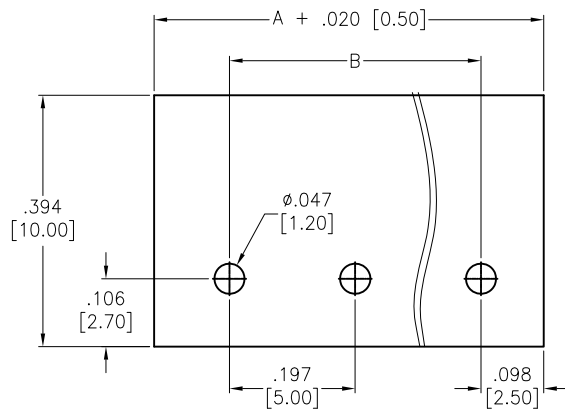
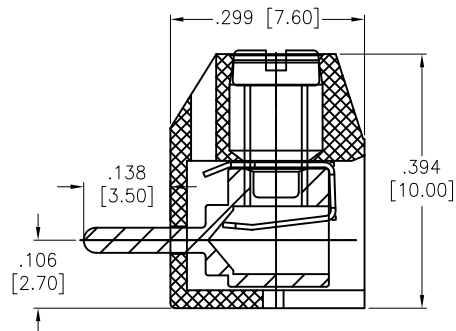


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/30/16	

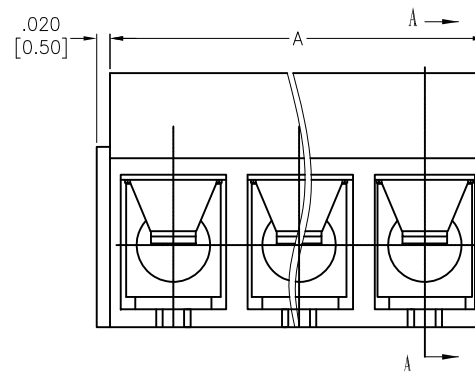

RECOMMENDED PCB LAYOUT

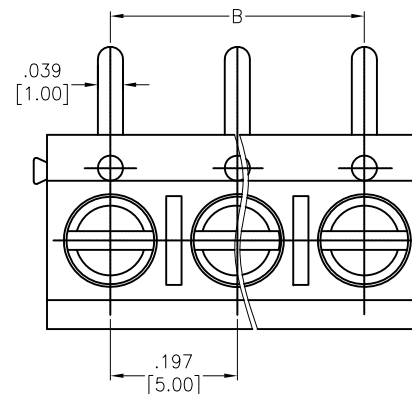

SECTION A-A

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Black

Contact: Brass, Tin plated

Screw: M2.5 Steel, Zinc plated

Shrapnel: Phosphor Bronze, Nickel plated

Electrical:

Voltage rated: 250 VAC

Current rated: 16 Amps

Contact resistance: 20 mΩ

Insulation resistance: 500 MΩ @ 500 VDC

Withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire range: 22-14AWG, 1.5mm²

Torque: 0.4N-m, 3.6lb-in

Strip length: 4.5-5mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A= .197 [5.00] x No. of Positions

B= .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	6/30/16
CHECKED	OC	6/30/16
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE EURO TERMINAL BLOCK, STRAIGHT
 .197 [5.00] PITCH, PCB TYPE, BLACK COLOR

SIZE	PART NO.	REV.
X	EBEAA-XX-C	-
REF: S00067C	SCALE: NTS	SHEET 1 OF 1