
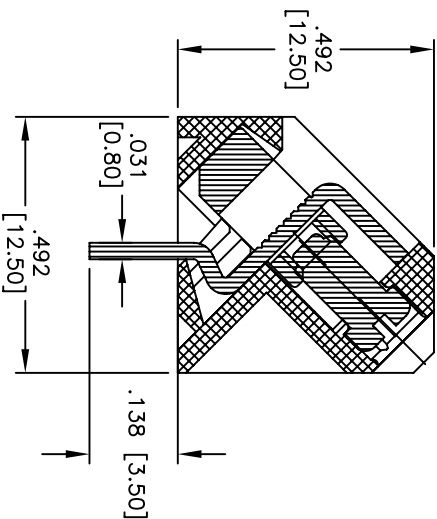


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/28/09	

APPROVED: _____

DATE: _____ TITLE: _____

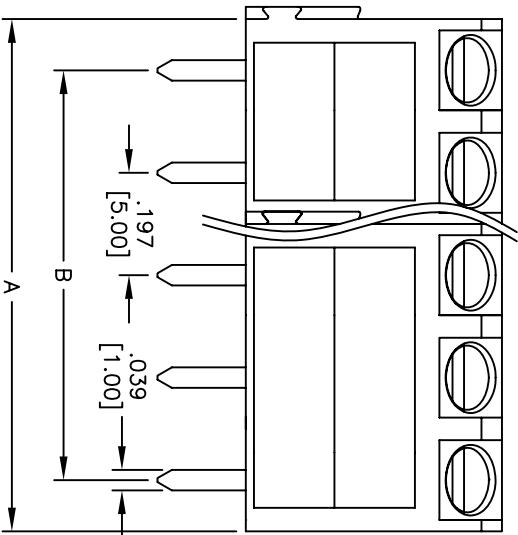

A = .197 [5.00] x No. of Positions
B = .197 [5.00] x No. of Spaces

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Black

Contact: Brass, Tin plated.

Screw: Steel

Electrical:

Operation voltage: 300 VAC max

Current rating: 15 Amps max per Pole

Insulation resistance: 500 Mohms @ 500 V

Dielectric withstanding voltage: 2000 VAC for 1 minute

Mechanical:

Screw Torque: 3.5 lbf-in

Wire Range: 12-24Awg.

Environmental:

Operating temperature: -33°C to +105°C

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES	HOLES		
.X ± .10	Ø.X ± .10		
.XX ± .020	Ø.XX ± .015		
.XXX ± .015	Ø.XXX ± .010		
APPROVALS		DATE	
DRAWN	DY	4/28/09	
CHECKED			
APPROVED			

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, PCB, 45 DEGREE ANGLE
PITCH: .197 [5.00]

SIZE	PART NO.	REV.
X	EBG-X-C	-
REF: S00026C	SCALE: NTS	SHEET 1 OF 1