

6

5

4

3





2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/04	
A		REDRAWN	10/26/11	

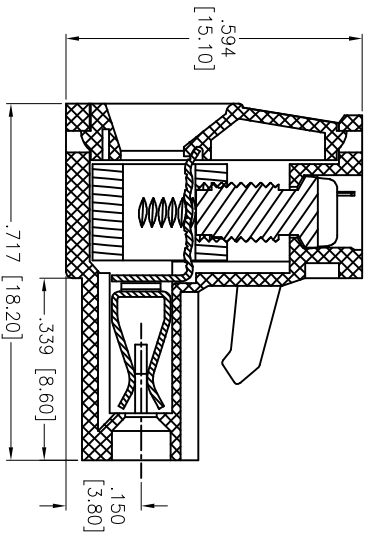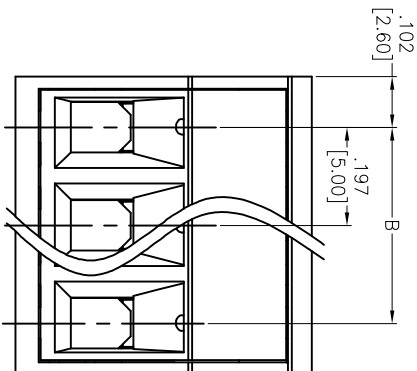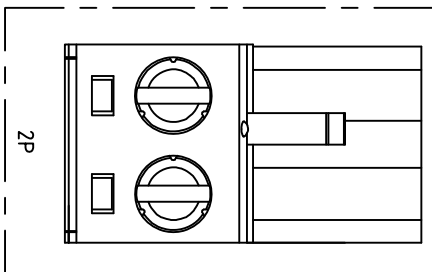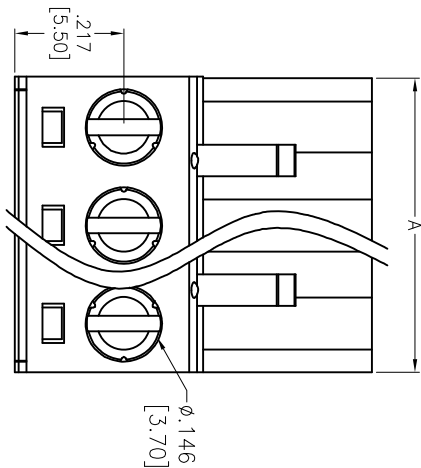

Positions: 2 thru 24
A = .197 [5.00] x No. of Positions
B = .197 [5.00] x No. of Spaces

	Tolerance
2-6P	±.006 [0.15]
7-12P	±.008 [0.20]
13-18P	±.012 [0.30]
19-24P	±.016 [0.40]

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Green

Clamp: Brass, Nickel plated

Contact: Phosphor Bronze, Tin plated

Screw: Steel, M3/Zn Plated

Electrical:

Operation voltage: 300 VAC

Current rating: 20 Amps

Withstanding Voltage: 1.6KV

Mechanical:

Wire range (mm²): 2.5

Solid wire (AWG): 12-24

Stranded wire (AWG): 12-24

Torque(lb-in): 5

Wire strip length (mm): 7-8

Temperature Rating:

Operating temperature: -40°C to +115°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, VERTICAL, .197 [5.00] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10				
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN				3/30/04			
SLS							
CHECKED							
APPROVED							
SIZE				PART NO.			
X				EBH-XX-C			
REV.				A			
REF:				S00007T			
SCALE:				NTS			
SHEET				1 OF 1			