
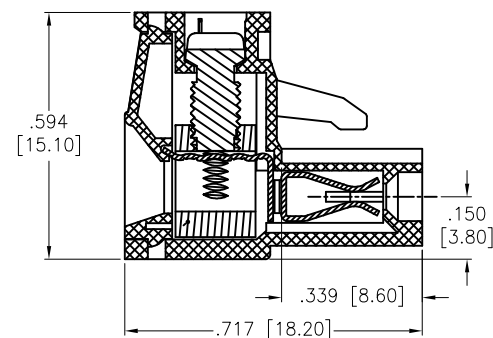
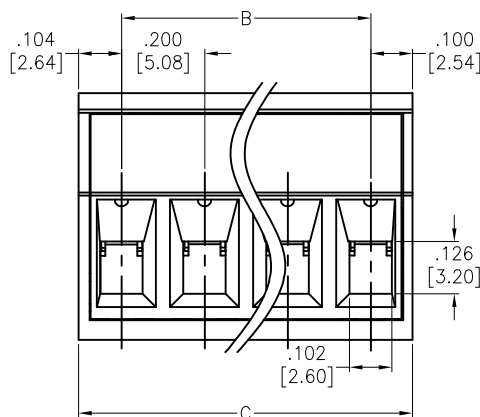



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/20	
A		ADDED RoHS TO SPECIFICATIONS	03/14/05	
B		REDRAWN	5/19/09	
C		UPDATE DRAWING	11/17/20	LH/LX

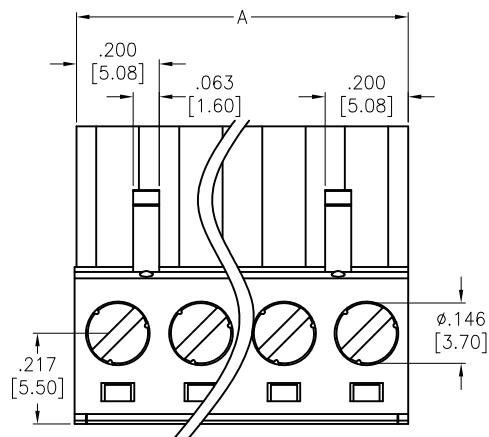

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Green

Contact: Phosphor Bronze, Tin plated

Screw: M3 Zinc Steel

Electrical:

Voltage rating: 300 VAC

Current rating: 20 A

Withstanding voltage: 1.6kv

Mechanical:

Solid wire: 12-24 AWG

Stranded wire: 12-24 AWG

Torque: 5Lb-in/0.5Nm

Wire Strip length: 7-8mm

Temperature Rating:

Operating temperature: -40°C to +115°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A = .200 [5.08] x No. of Positions

B = .200 [5.08] x No. of Space

C = .200 [5.08] x No. of Positions + .004 [0.10]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SLS	02/16/05
CHECKED		
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
TERMINAL BLOCK PLUGGABLE, RIGHT ANGLE,
.200" [5.08] PITCH

SIZE X	PART NO. EBH-XX-D	REV. C
REF: S00007T	SCALE: NTS	SHEET 1 OF 1