

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/7/11	


APPROVED: _____


DATE: _____ TITLE: _____

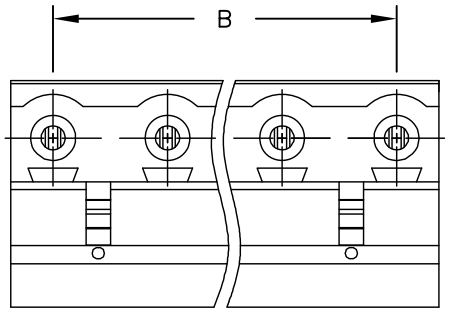



	Dim A	Dim B
2–4P	±.006 [0.15]	±.006 [0.15]
5–8P	±.008 [0.20]	±.008 [0.20]
9–12P	±.012 [0.30]	±.012 [0.30]
13–16P	±.016 [0.40]	±.016 [0.40]

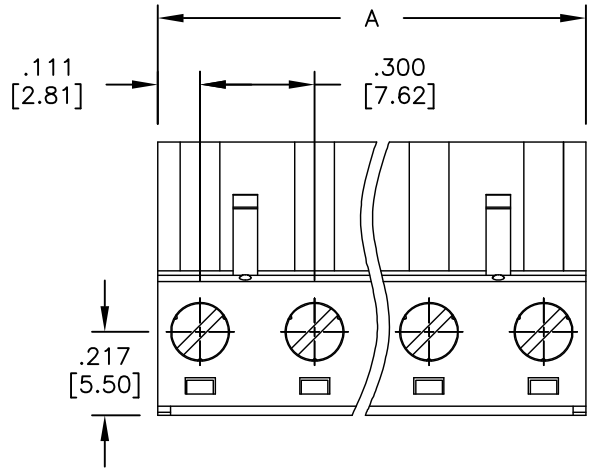

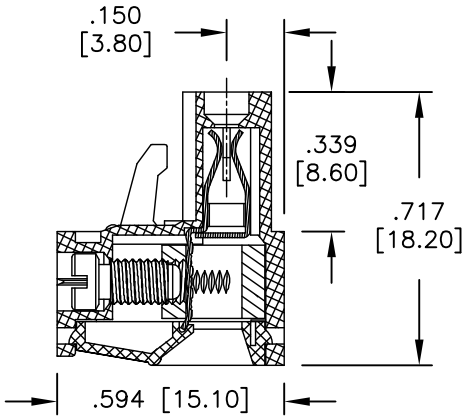

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Cover: Thermoplastic, rated UL 94V–0
Clamp: Brass, Nickel plated
Screw: M3.0, Steel, Zn plated.
Contact: Phosphor Bronze, Tin plated.
Electrical:
Operation voltage: 300 VAC
Current rating: 20 Amps
Mechanical:
Wire strip length: 7–8mm
Torque (Lb–In): 5
Wire Range: 12–24 Awg
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: –40°C to +115°C
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 2 thru 16
A = .300 [7.62] X No. of Spaces + .221 [5.62]
B = .300 [7.62] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	3/7/11
CHECKED	JL	3/7/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE
.300 [7.62] PITCH, EURO BLOCKS, PLUGABLE

SIZE	PART NO.	REV.
X	EBH-XX-G	-

REF: S00007T | SCALE: NTS | SHEET 1 OF 1