
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/1/13	
A		UPDATE DRAWING	8/13/18	AY/TW
B		UPDATE DRAWING	12/9/22	WX/YC1
C		UPDATED SPEC.	2/16/23	JJ/LW

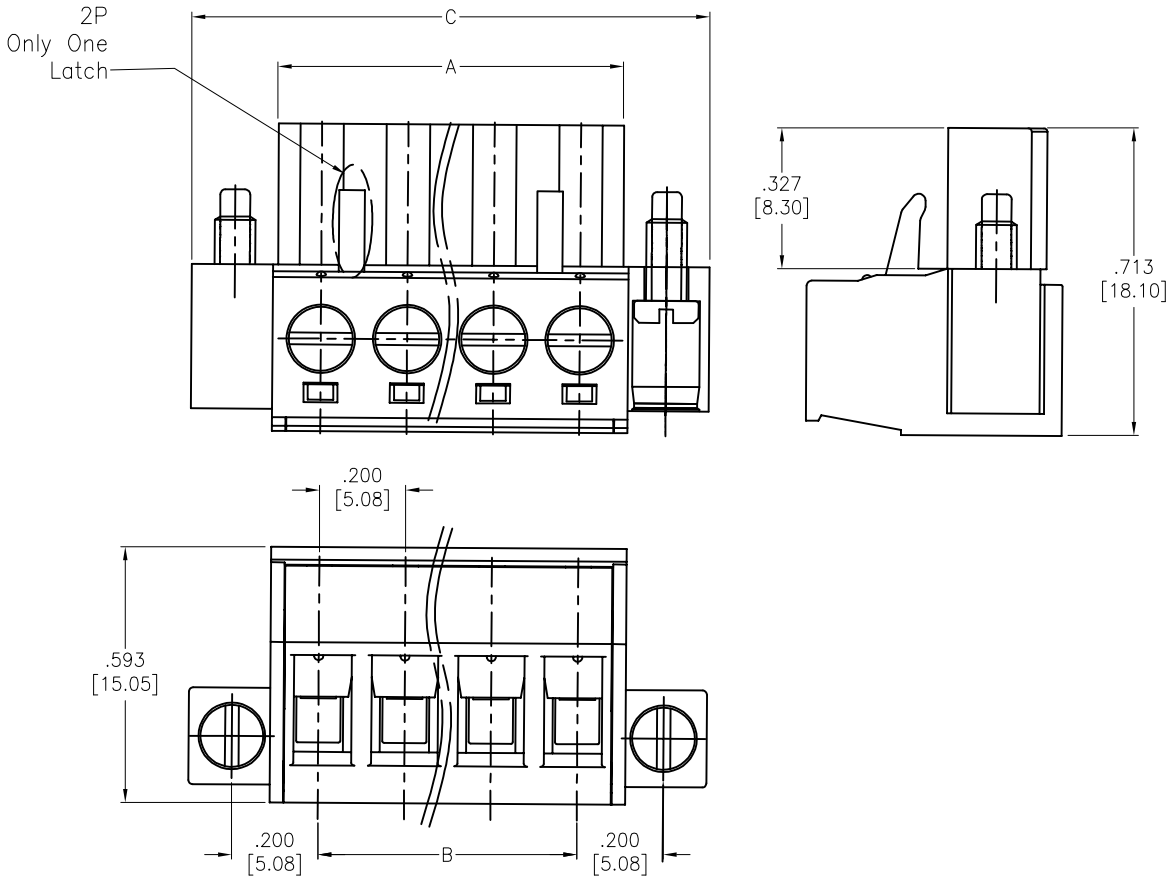

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Copper Alloy, Nickel plated

Screw: M3.0

Electrical:

Voltage rated: 300V

Current rated: 15A

Withstanding voltage: 1,600V AC/1 Min

Mechanical:

Solid wire: 28-12AWG

Torque (Lb-In): 0.5Nm

Strip length: 7-8mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

Positions: 02 thru 24

A= .200 [5.08] x No. of Positions per Row

B= .200 [5.08] x No. of Space

C= .200 [5.08] x No. of Positions per Row + .400 [10.16]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	AY	8/1/13
CHECKED	NP	8/1/13
APPROVED		

TITLE: .200 [5.08] TERMINAL BLOCK, SLOTTED SCREW

SIZE	PART NO.	REV.
X	EBHA-XX-D-E	C

REF: S00067C | SCALE: NTS | SHEET 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH