

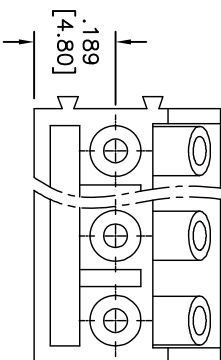
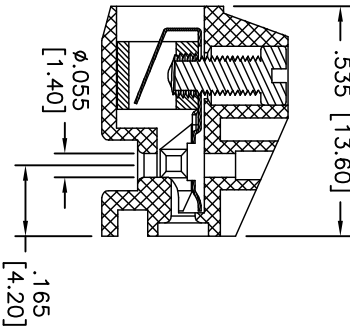
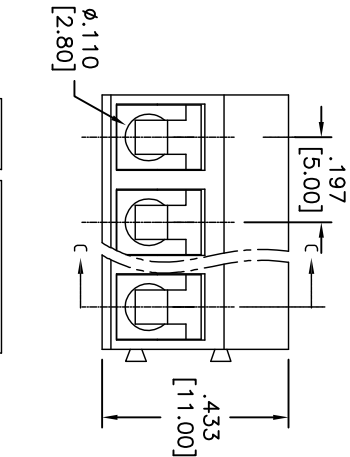


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/06/07	
A		REDRAWN	7/12/10	
B		REDRAWN	8/22/13	AY/SC

APPROVED: _____
DATE: _____ TITLE: _____

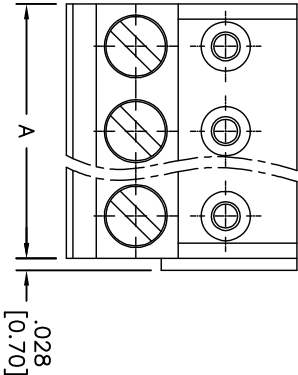

	Dim A	Dim B
2-6P	±.006 (0.151)	±.004 (0.101)
7-12P	±.010 (0.251)	±.006 (0.151)
13-18P	±.012 (0.301)	±.008 (0.201)
19-24P	±.016 (0.401)	±.012 (0.301)

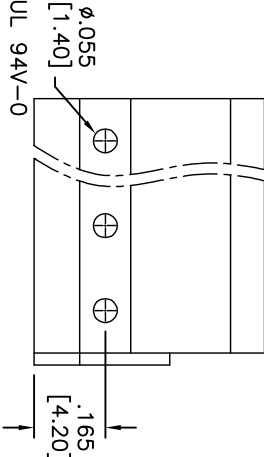

Positions: 02 thru 24
A = .197 [5.00] X No. of Positions
B = .197 [5.00] x No. of Spaces

SPECIFICATIONS:

Material: Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Green
Contact: Phosphor Bronze, Tin plated.
Screw: Steel, M2.6/Zn plated.
Electrical:
Operation voltage: 300 VAC max
Current rating: 15 Amps
Torque (lb-in): 3.5
Wire range: 0.34-1.5mm²
Solid wire (AWG): 14-22
Stranded wire (AWG): 14-22
Withstanding Voltage: 1.6KV
Wire strip length: 5-6mm
Environmental:
Operating temperature: -40°C to +115°C
Lead free, RoHS compliant.



ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710
EURO BLOCK, HEADER, .197 [5.00mm]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		
X	± .10	ØXX ± .10
.XX	± .020	ØXX ± .015
.XXX	± .015	ØXXX ± .010
APPROVALS		DATE
DRAWN	SLS	11/06/07
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	EBJ-XX-C	B
REF:	S00007T	SCALE: NTS
		SHEET 1 OF 1