


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/14	
A		UPDATE DRAWING	10/29/21	LH/KC

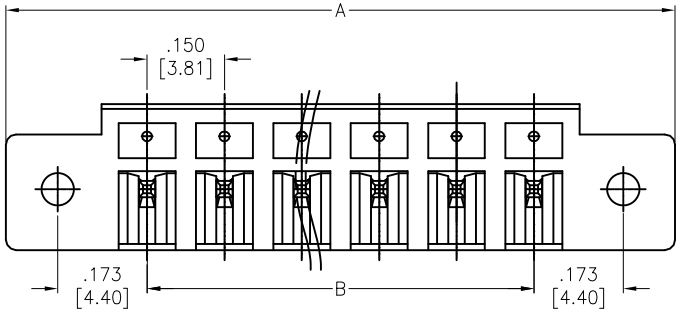

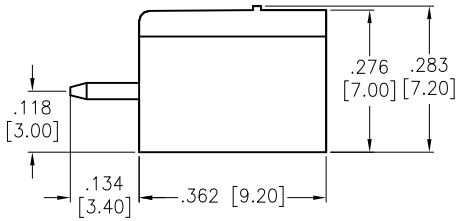

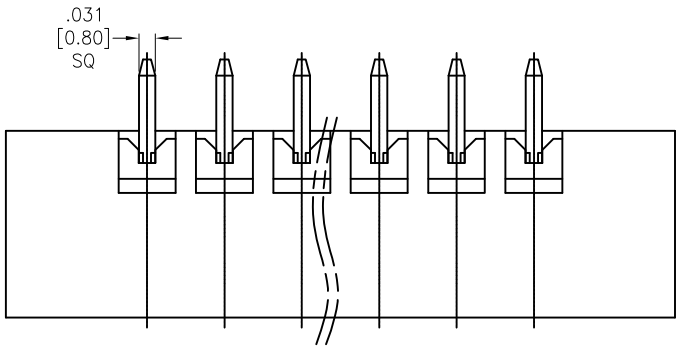

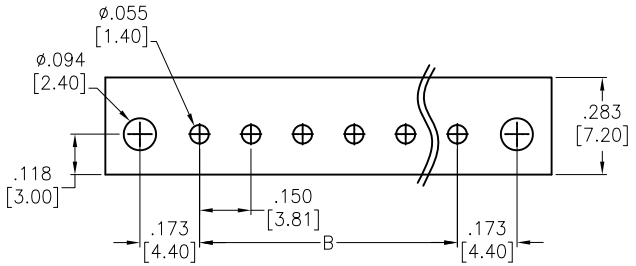

RECOMMENDED PCB LAYOUT

Positions: 02 thru 24
A= .150 [3.81] x No. of Spaces + .551 [14.00]
B= .150 [3.81] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin plated
Electrical:
Voltage rating: 300 VAC
Current rating: 8 Amp
Dielectric withstanding voltage: 1,600V for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	12/3/14
CHECKED	TW	12/3/14
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
TERMINAL BLOCK, STRAIGHT, .150" [3.81] PITCH W / FLANGE

SIZE	PART NO.	REV.
X	EBRA-XX-B-E	A

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1