
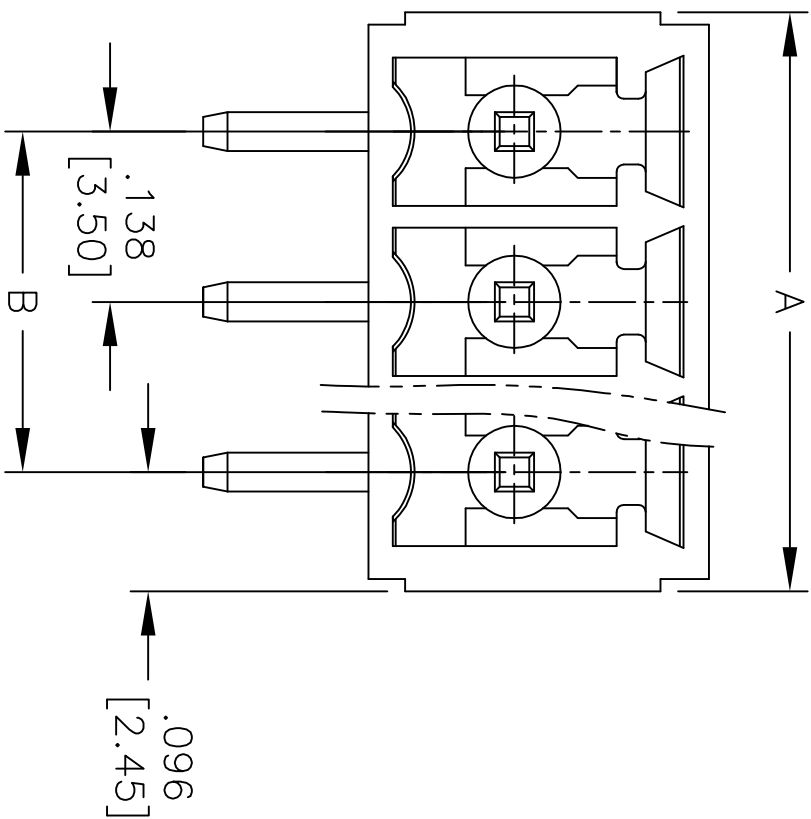


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/07	
A		REDRAWN	6/26/12	

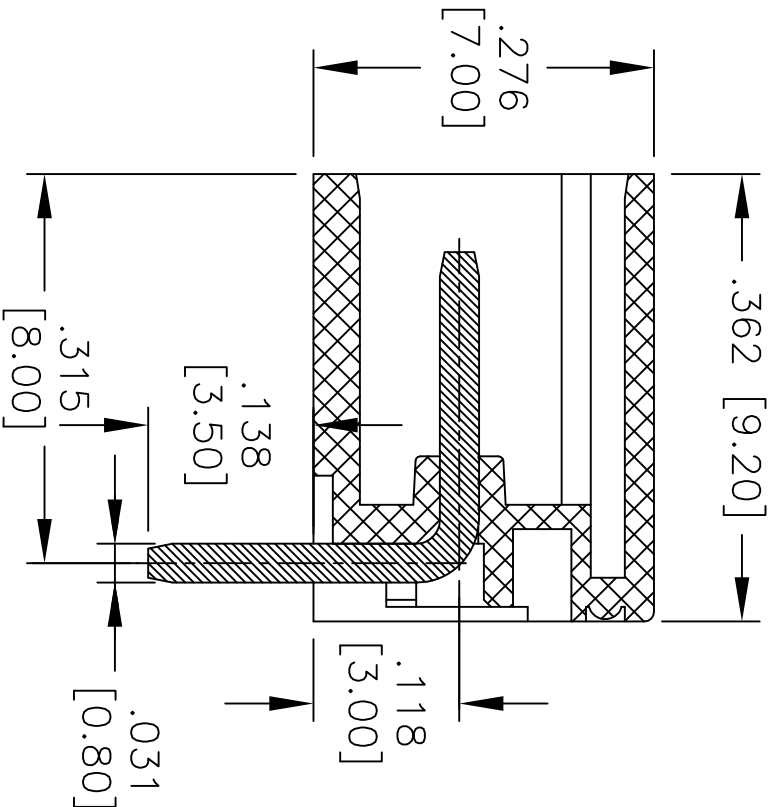

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Green

Wire Guard: Phosphor Bronze, Tin plated

Terminal Body: Brass, Zinc pated

Screw: Steel, Zinc plated

Electrical:

Operation voltage: 300V

Current rating: 8 Amps

Insulation resistance: 500 Mohms min @ 500V

Dielectric withstanding voltage: 2000 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.

Operating temperature: -40°C to +105°C



Positions: 02 thru 24
A = .138 [3.50] x No. of Positions + .055 [1.40]
B = .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES		HOLES		TITLE EURO BLOCK, 3.50mm PLUGGABLE 2 THRU 24 POLES			
.X	± .10	Ø.X	± .10	SIZE	PART NO.	REV.	
.XX	± .020	Ø.XX	± .015	X	EBS-XA	A	
.XXX	± .015	Ø.XXX	± .010	REF:	S00026C	SCALE:	NIS
APPROVALS	DATE	SHEET 1 OF 1					
DRAWN	SS	6/13/07					
CHECKED							
APPROVED							