
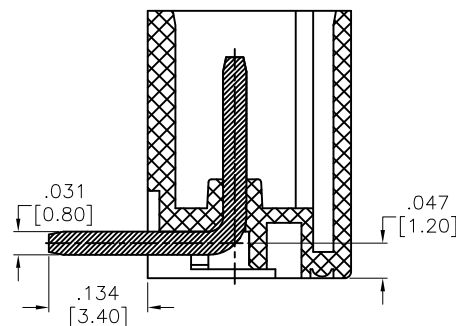
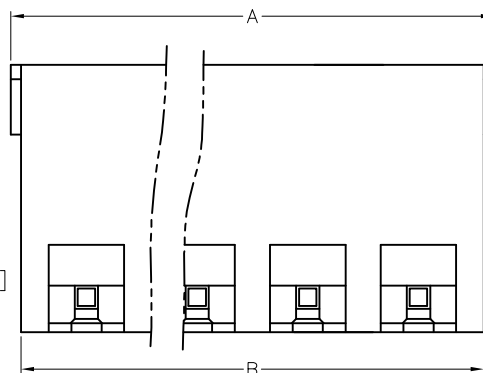
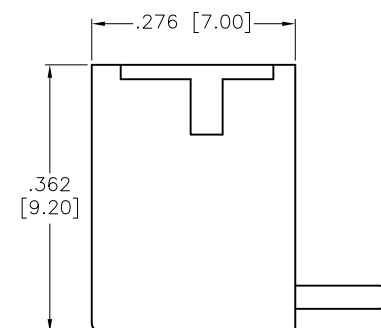



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/07	
A	11923	REDRAWN	2/10/12	
B		UPDATE DRAWING	6/26/18	AY/SL

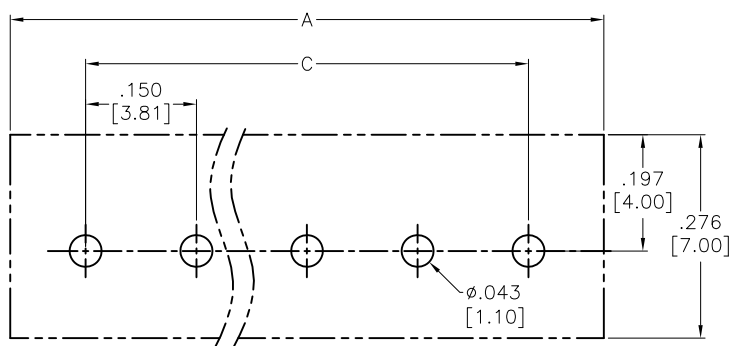

RECOMMENDED PCB LAYOUT

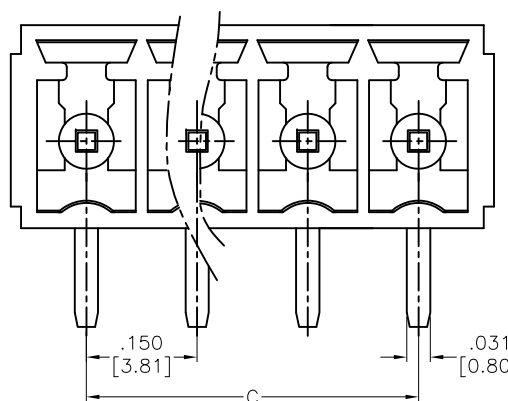

Positions: 02 thru 24

A = .150 [3.81] x No. of Spaces + .205 [5.20]

B = .150 [3.81] x No. of Spaces + .177 [4.50]

C = .150 [3.81] x No. of Spaces

	Tolerance
2-8P	±.004 [0.10]
9-12P	±.006 [0.15]
13-16P	±.008 [0.20]
17-20P	±.010 [0.25]
21-24P	±.012 [0.30]

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Copper Alloy, Tin plated

Electrical:

Voltage rating: 300 VAC

Current rating: 8 Amp

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	6/13/07
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

EURO BLOCK, .150 [3.81] PITCH, RIGHT ANGLE

SIZE	PART NO.	REV.
X	EBS-XX-B	B
REF:	S00026C	SCALE: NTS
SHEET 1 OF 1		