

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

3/11/15

D

D

C





C

B

B

A

A

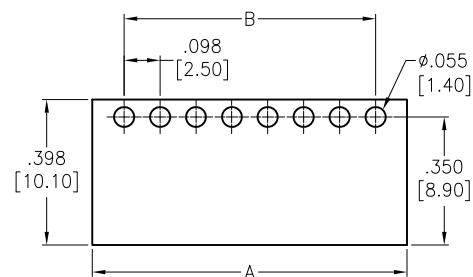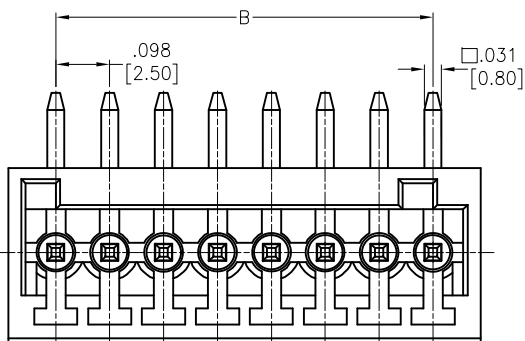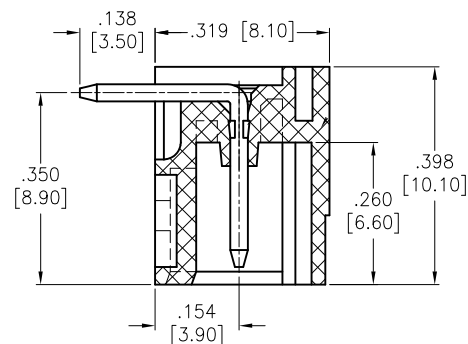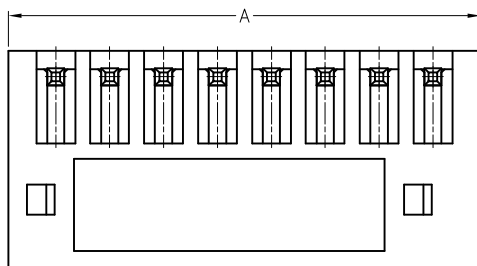

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Brass, Tin plated

Electrical:

Voltage rating: 150V

Current rating: 5A

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1250 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A= .098 [2.50] x No. of Spaces + .173 [4.40]

B= .098 [2.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

AY

3/11/15

CHECKED

NP

3/11/15

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

TERMINAL BLOCK, RIGHT ANGLE, .098" [2.50] PITCH

SIZE

X

PART NO.

EBSA-XX-V

REV.

-

REF: S00067C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1