
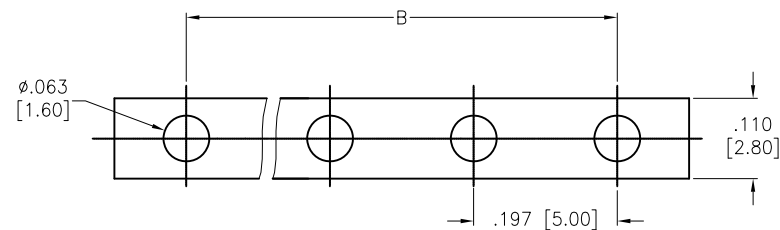
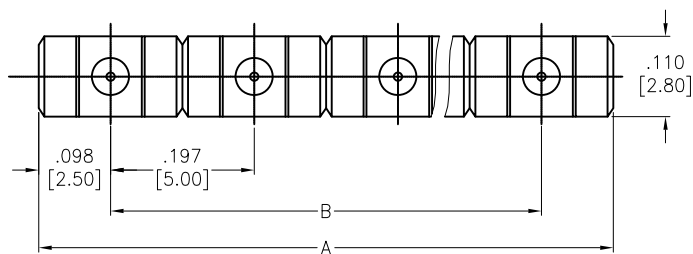


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/22/14	
A		UPDATE SPEC.	5/10/21	WX/EY

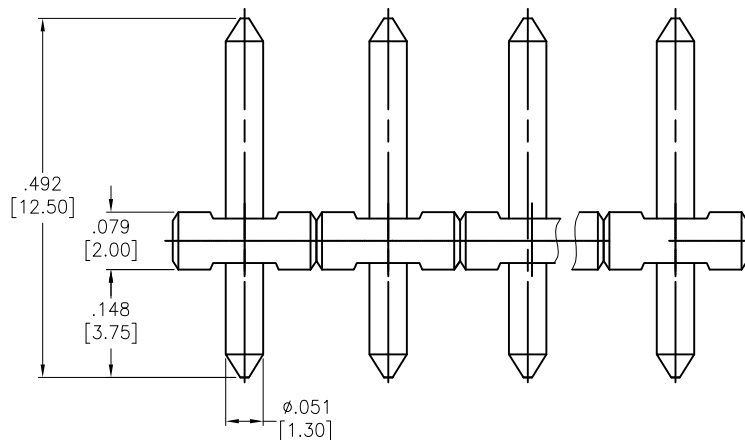

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy, Tin plated

Electrical:

Voltage rating: 300V

Current rating: 10 Amp

ielectric withstanding voltage: 1600 VAC for 1 minute

Environmental:

Operating temperature: -30°C to +120°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	HR	4/22/14
CHECKED	SY	4/22/14
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		PLUGGABLE HEADER, 5.00mm 2 THRU 24 PINS		
SIZE	PART NO.	EBTA-XX-C		REV. A
REF:	S00067C	SCALE:	NTS	SHEET 1 OF 1