

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	10/12/11	

APPROVED: _____

DATE: _____ TITLE: _____

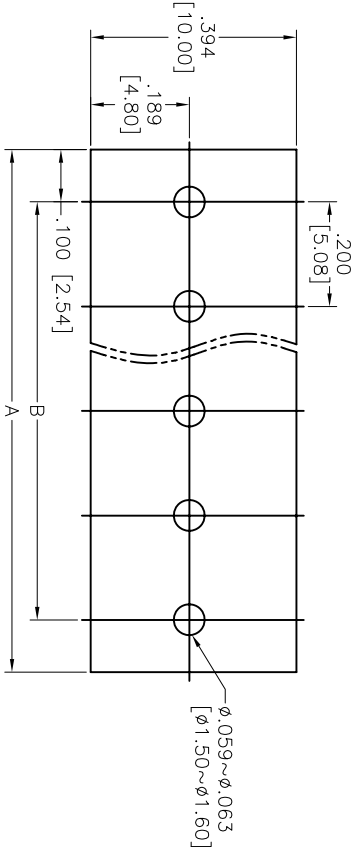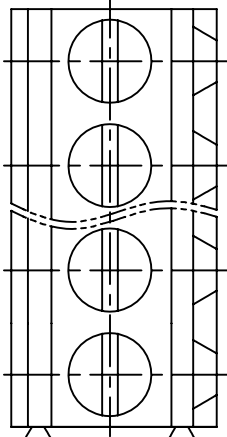

RECOMMENDED PCB LAYOUT

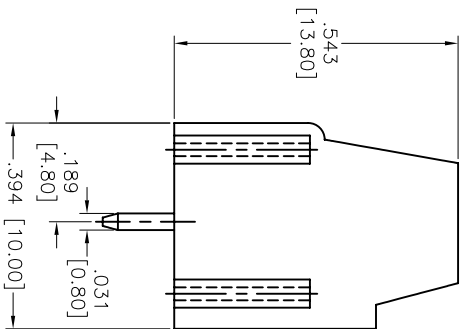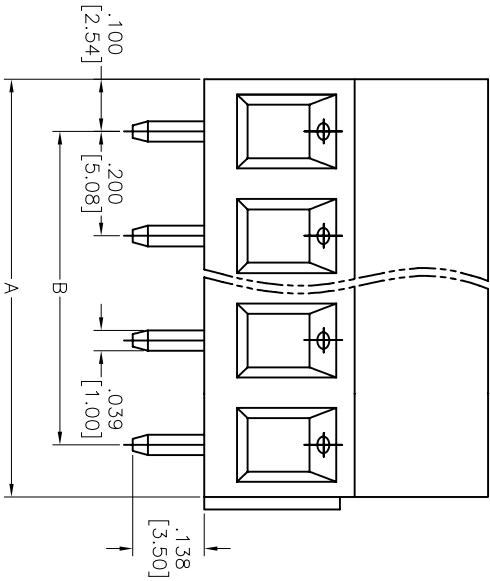

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Copper alloy, Tin plated

Wire cage: Steel, M2.5/Zn plated

Screw: Steel, M2.5/Zn plated

Electrical:

Operation voltage: 300 VAC

Current rating: 20 Amps

Insulation resistance: 500 Mohms @ 500VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire range (mm²): 0.5~2.5

Torque(N*m): 0.4

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 24
A= .200 [5.08] x No. of Positions
B= .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	ØX	HOLE
.X ± .10	ØX ± .10	
.XX ± .020	ØXX ± .015	
.XXX ± .015	ØXXX ± .010	

APPROVALS

DRAWN	TW	10/12/11
CHECKED	AY	10/12/11
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE

TERMINAL BLOCK, .200 [5.08] PITCH

SIZE	PART NO.	REV.
X	EBV-XX-D	-
SEE:	S00024T	SCALE: NTS
SHEET 1		OF 1