
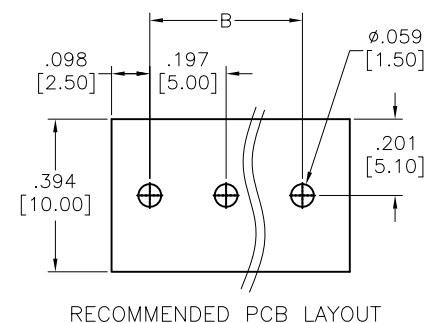
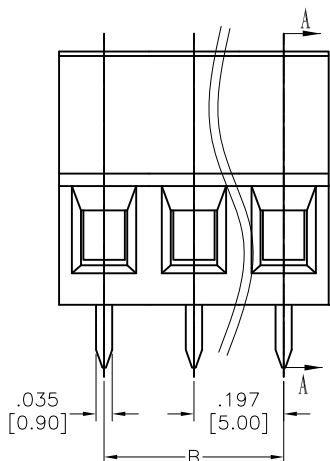
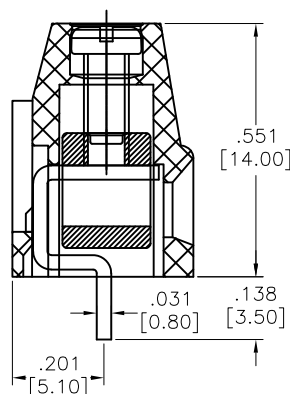


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/2/13	
A		UPDATED DRAWING	1/18/19	HR/RT
B		UPDATED SPEC.	10/7/20	LH/EY

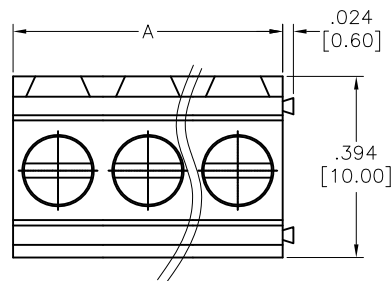

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Screw: M2.5 Steel

Contact: Copper Alloy, Tin Plated

Electrical:

Voltage rated: 300 V

Current rated: 15 A

Withstanding voltage: 1,600 for 1 minute

Mechanical:

Wire range: 30~14 AWG

Torque : 0.4 Nm

Strip length: 6~7mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM
TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE

TERMINAL BLOCK, .197 [5.00] PITCH

APPROVALS		DATE
DRAWN	AY	8/2/13
CHECKED	NP	8/2/13
APPROVED		

SIZE X	PART NO. EBVA-XX-C	REV. B
REF: S00067C	SCALE: NTS	SHEET 1 OF 1