

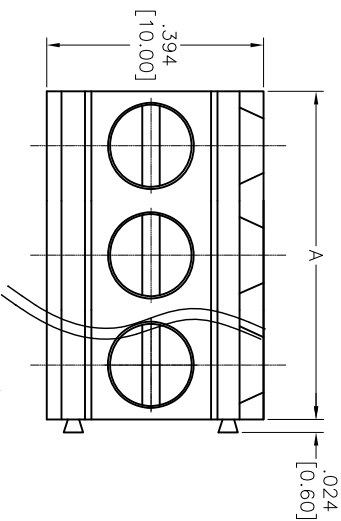


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/29/13	
A		REVISED PART NO.	1/16/14	HR
B		UPDATE SPEC.	1/29/15	AV/CH

APPROVED: _____
DATE: _____ TITLE: _____

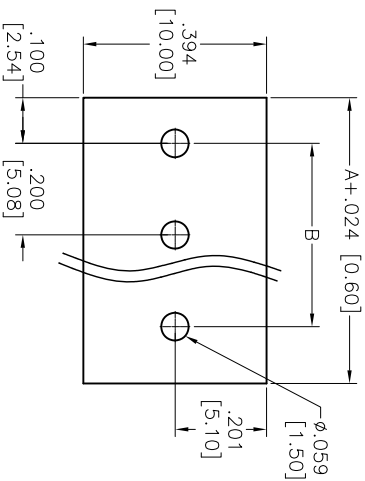

RECOMMENDED PCB LAYOUT

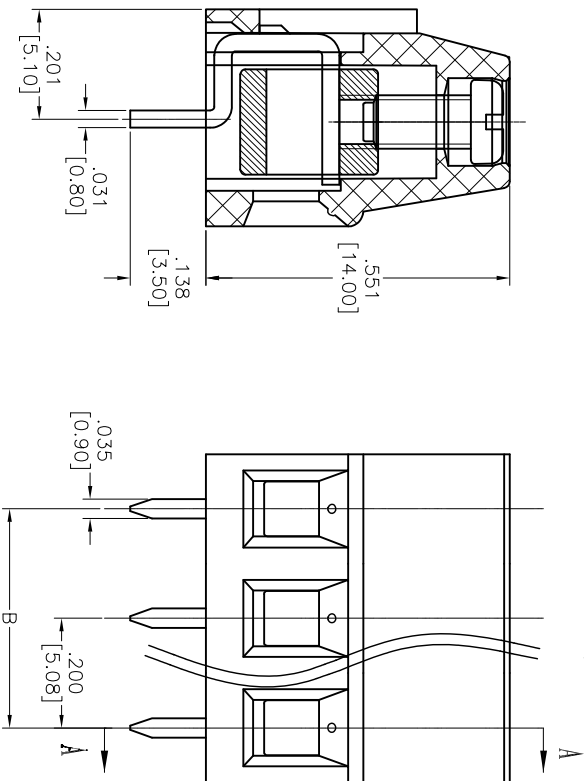

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Screw: Steel, M2.5/Zinc plated

Cage: Brass, Tin plated

Pin Header: Brass, Tin plated

Electrical:

Operation voltage: UL: 300V max, IEC: 250V max

Current rating: UL: 15 Amps max, IEC: 17.5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2000 VAC for 1 minute

Mechanical:

Wire range: 30-14AWG, 1.5mm²

Torque: 0.4N-m, 3.6Lb-in

Strip Length: 6-7mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 24
A = .200 [5.08] x No. of Positions
B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	AY			8/29/13							
CHECKED	AH			8/29/13							
APPROVED											
TITLE				SIZE				PART NO.			
TERMINAL BLOCK, .200 [5.08] PITCH				X				EB/A-XX-D			
REF: S00067C				SCALE: NTS				SHEET 1 OF 1			
REV. B											

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710