


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/03/10	
A		UPDATE DRAWING	5/4/18	AY/SL

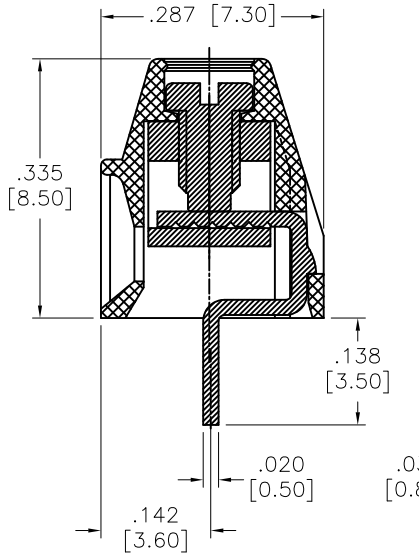

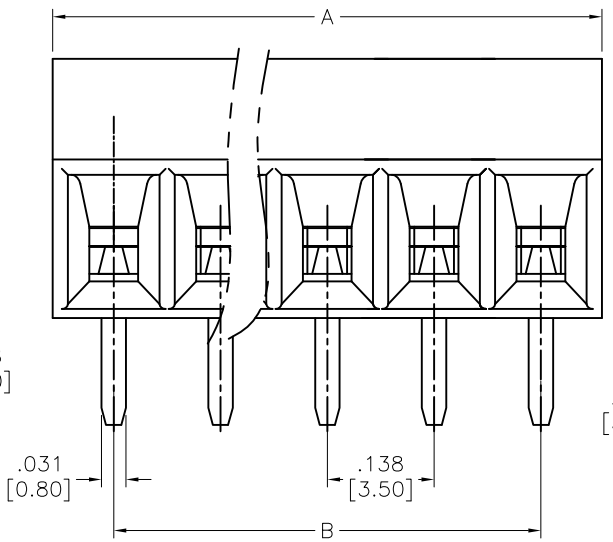

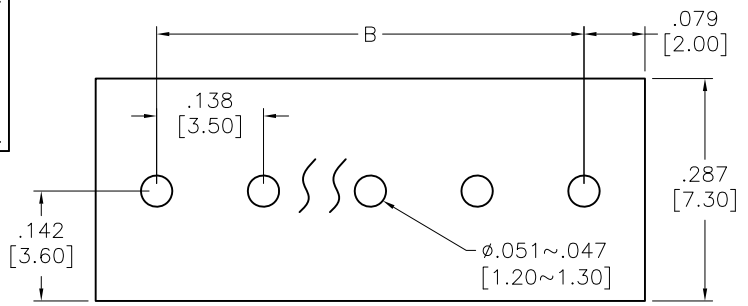

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Green
Metal Clamp: Brass, Nickel plated
Contact: Brass, Tin plated
Screw: M2 Steel, Zinc plated
Electrical:
Voltage rating: 300 VAC
Current rating: 10A
Mechanical:
Wire range: 30-16 AWG
Torque: 1.7Lb-In
PCB hole Dia: ø1.1mm
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 2 thru 24
A = .138 [3.50] x No. of Spaces + .157 [4.00]
B = .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	8/03/10
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: TERMINAL BLOCK, PCB, VERTICAL, .138" [3.50] PITCH

SIZE	PART NO.	REV.
X	EBW-XX-A	A

REF: S00026C | SCALE: NTS | SHEET 1 OF 1