
Rev	AWO #	Description	Date	Appr
-		RELEASED	1/22/20	


APPROVED: _____


DATE: _____ TITLE: _____



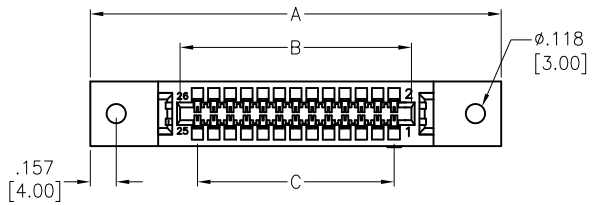

CONTACT DETAIL

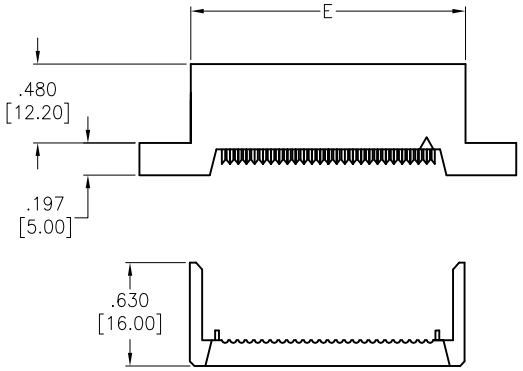



Positions: 10, 14, 16, 20, 26, 34, 40, 50, 60, 62, 64
A = .100 [2.54] x No. of Positions per Row + 1.195 [30.36]
B = .100 [2.54] x No. of Positions per Row + .110 [2.80]
C = .100 [2.54] x No. of Spaces
E = .100 [2.54] x No. of Positions per Row + .380 [9.66]

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate on contact area
Nickel underplate Overall
Electrical:
Current rating: 1 Amp.
Contact resistance: 30 mohms max.
Insulation resistance: 3,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/22/20
CHECKED	KL	1/22/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 [2.54] IDC CARD EDGE SOCKET W/ROUND HOLE MOUNTING EAR

SIZE	PART NO.	REV.
X	FCE-XX-SG-C2-MH	-

REF: S00072T | SCALE: NTS | SHEET 1 OF 1