
2018.01.1
0 11:04:43
+08'00'

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/10/18	

APPROVED: _____

DATE: _____ TITLE: _____

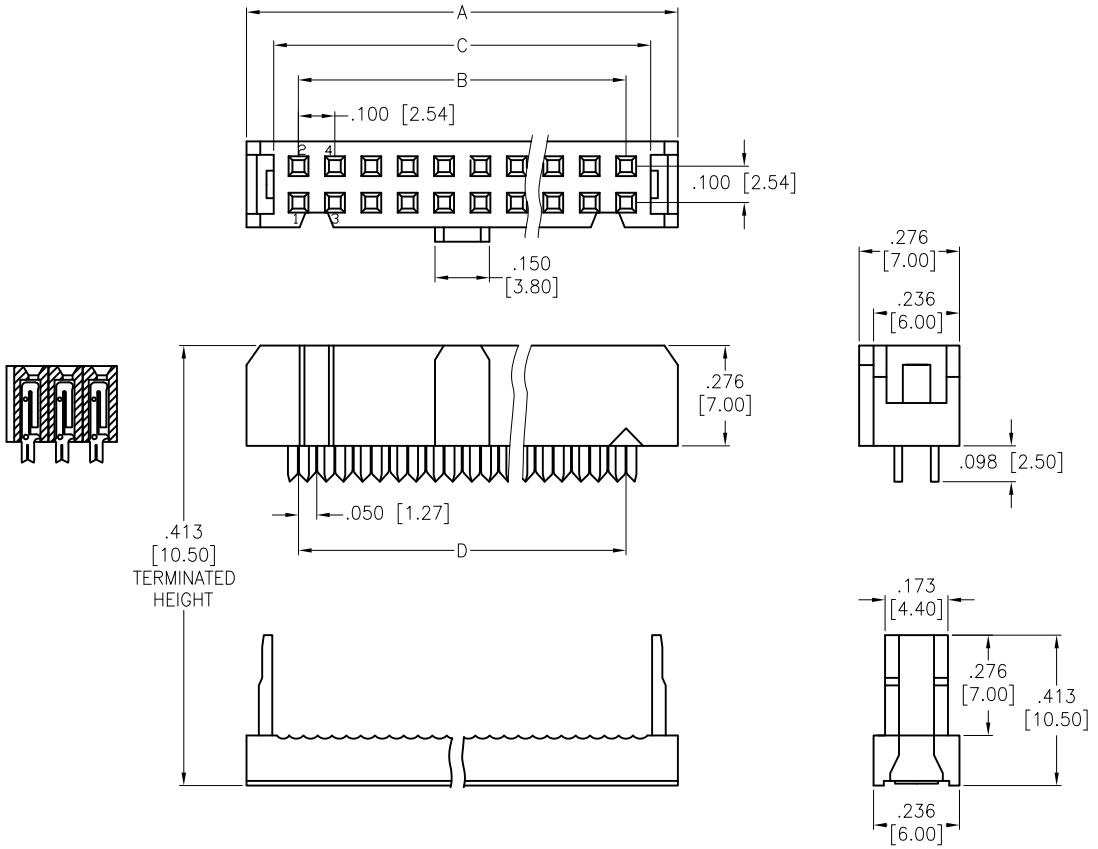

Positions: 06, thru 64
A = .100 [2.54] x No. of Positions per Row + .185 [4.70]
B = .100 [2.54] x No. of Spaces
C = .100 [2.54] x No. of Positions per Row + .035 [0.90]
D = .100 [2.54] x No. of Positions per Row – .050 [1.27]

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 3 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
–40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	1/10/18
CHECKED	YC	1/10/18
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] FLAT CABLE IDC SOCKET
STANDARD SINGLE WIPE CONTACTS

SIZE	PART NO.	REV.
X	FCS-C1-XX-G	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1