

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/2/11	

APPROVED: _____

DATE: _____ TITLE: _____

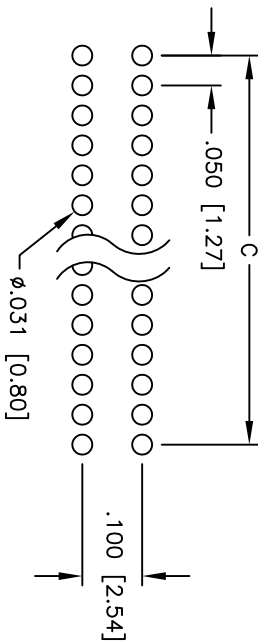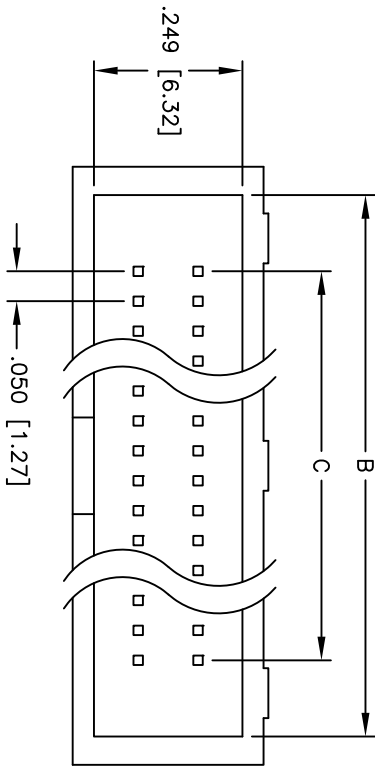

PCB LAYOUT

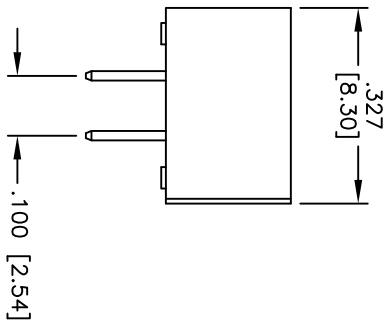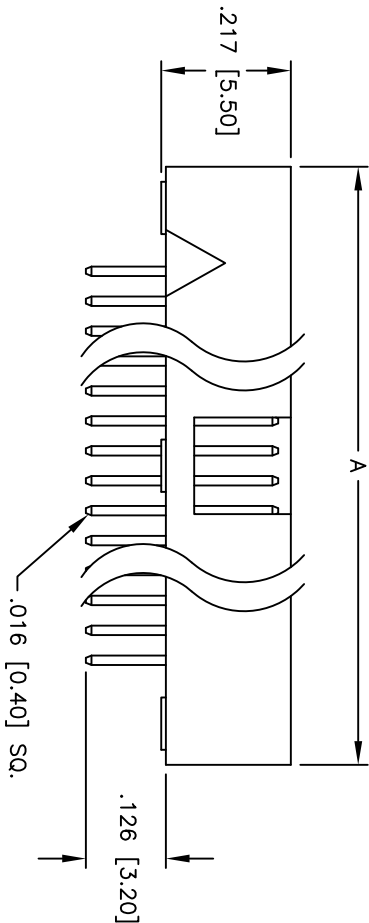

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max.

Current rating: 1 Amp max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 1,000 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 230°C for 5 seconds

Positions: 10, 20, 30, 40, 50, 60, 70, 80, 90, 100
A = .050 [1.27] x No. of Spaces + .349 [8.87]
B = .050 [1.27] x No. of Spaces + .255 [6.47]
C = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES	
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	DATE
AY	3/2/11
CHECKED	
VW	3/2/11
APPROVED	

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.050" x .100" BOX HEADER
VERTICAL MOUNT

SIZE		PART NO.		REV.	
X		HBHR-A-XX-VG		-	
REF.		SCALE		SHEET	
		NTS		1 OF 1	



6

5

4

3

2

1