

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/08/10	
A		UPDATED DRAWING	11/4/15	HR/TW

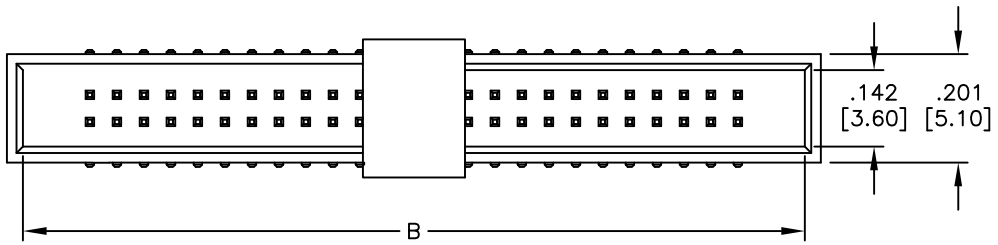

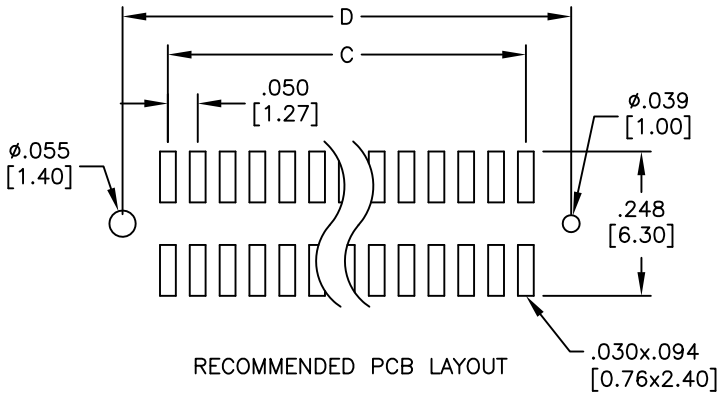

RECOMMENDED PCB LAYOUT

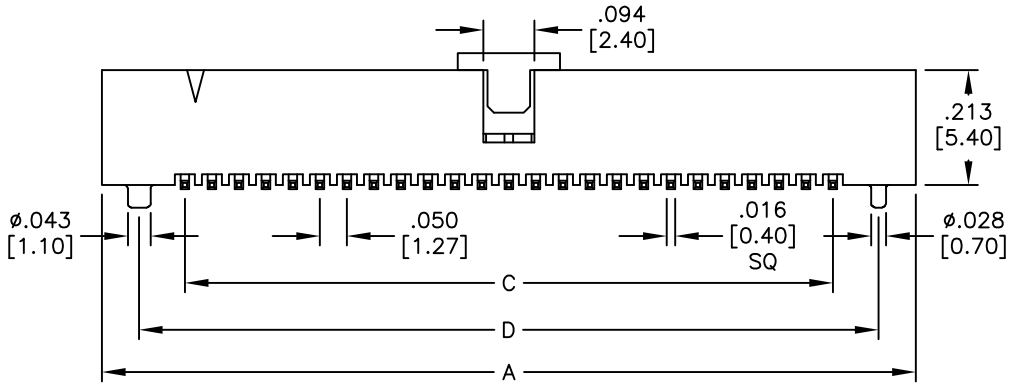

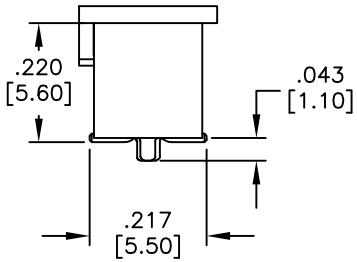

PACKAGED ON TAPE & REEL

Positions: 06, 08, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 64, 68, 80, 100

A = .050 [1.27] x No. of Spaces + .298 [7.57]
B = .050 [1.27] x No. of Spaces + .239 [6.07]
C = .050 [1.27] x No. of Spaces
D = .050 [1.27] x No. of Spaces + .171 [4.37]

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	9/08/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" x .050" BOX HEADER, VERTICAL MOUNT, SURFACE MOUNT, W/ PEG, W/ CAP

SIZE	PART NO.	REV.
X	HBHR-B-XX-VG-SMT-P-PP-T/R	A

REF: S00041T | SCALE: NTS | SHEET 1 OF 1