

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/05	
A		REDRAWN	9/4/14	HR/LL

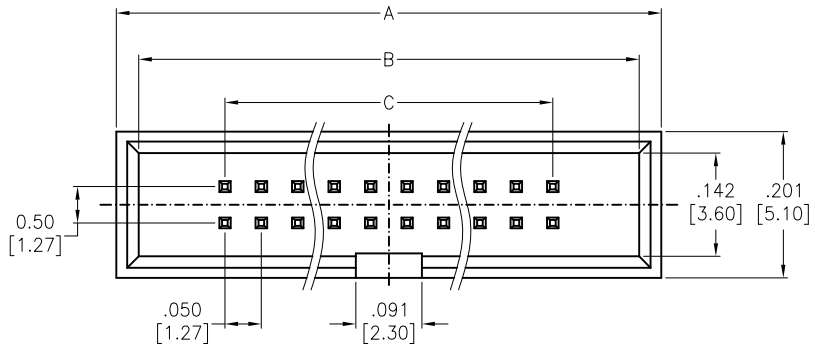

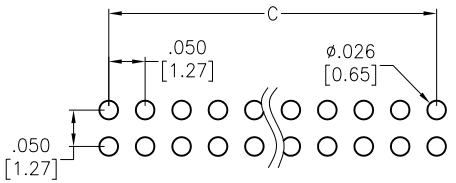

RECOMMENDED PCB LAYOUT

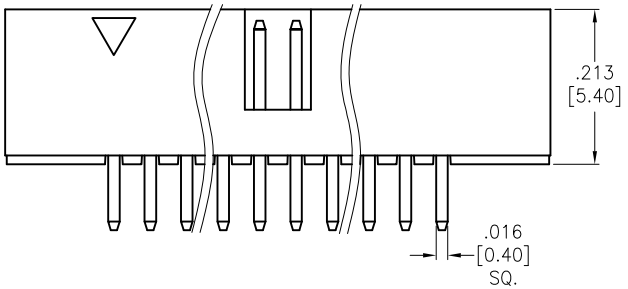



SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails
Electrical:
Current rating: 1 Amp max.
Contact resistance: 10 mohms max @ 100 mA
Insulation resistance: 5,000 Mohms min. @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 10, 12, 14, 16, 20, 24, 26, 28, 30, 34, 40, 44, 50, 60, 64, 68, 80, 100
A = .050 [1.27] x No. of Spaces + .298 [7.57]
B = .050 [1.27] x No. of Spaces + .237 [6.02]
C = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	3/24/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" x .050" BOX HEADER VERTICAL MOUNT

SIZE	PART NO.	REV.
X	HBHR-B-XX-VSG	A

REF: S00059T | SCALE: NTS | SHEET 1 OF 1