
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/22/19	
A		UPDATE DIM.	9/5/19	LH/YC

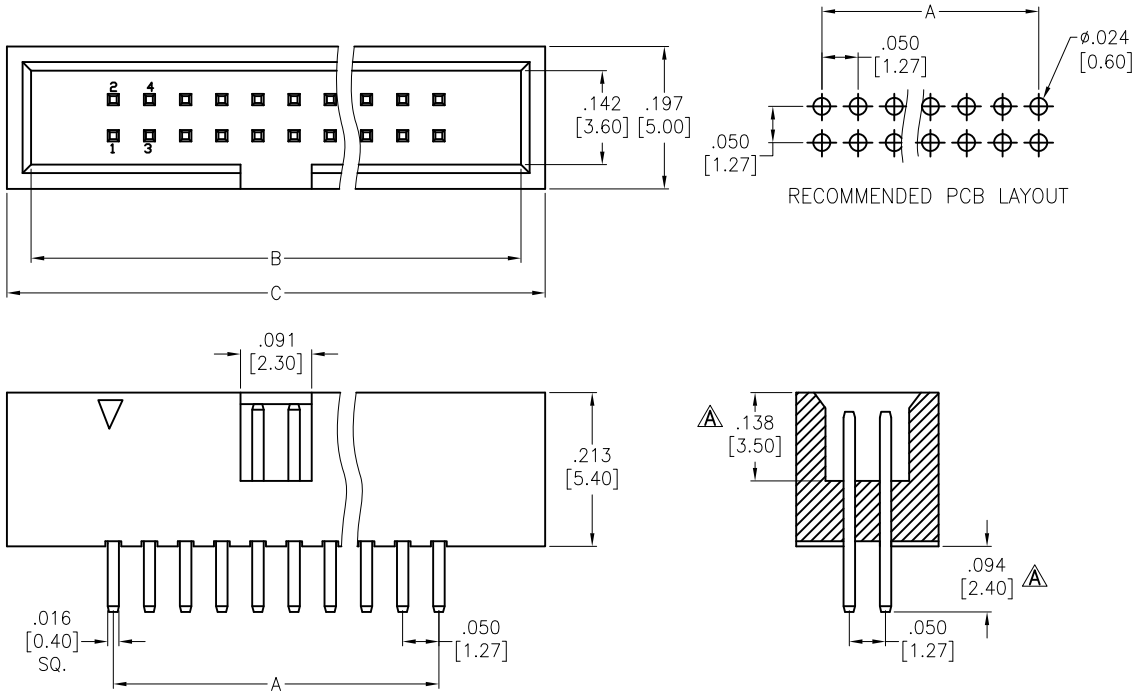

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

10u" Gold over Nickel underplate on contact area, Tin over Nickel underplate on solder tails

Electrical:

Current rating: 1 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 4 thru 100

A = .050 [1.27] x No. of Spaces

B = .050 [1.27] x No. of Positions per Row + .193 [4.90]

C = .050 [1.27] x No. of Positions per Row + .244 [6.20]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	4/22/19
CHECKED	TW	4/22/19
APPROVED		

ADAM TECH INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .050" x .050" BOX HEADER, VERTICAL, DIP TYPE, 10u" SEL-GOLD PLATED

SIZE	PART NO.	REV.
X	HBHR-B2-XX-VSG-10	A

REF: S00111C | SCALE: NTS | SHEET 1 OF 1