

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/7/18	
A		UPDATE DRAWING	7/6/20	AY/LL1
B		UPDATE DRAWING	4/20/22	WX/TL

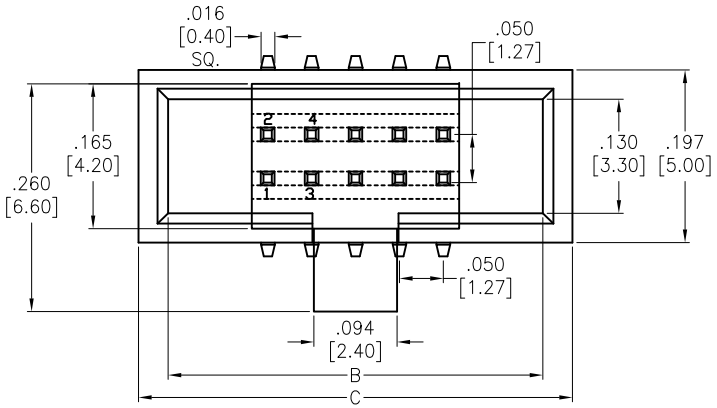

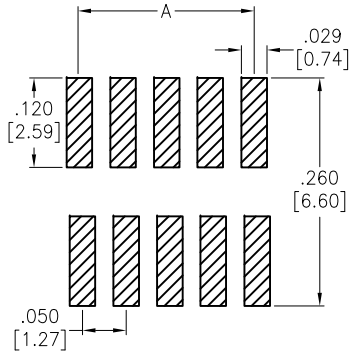

RECOMMENDED PCB LAYOUT

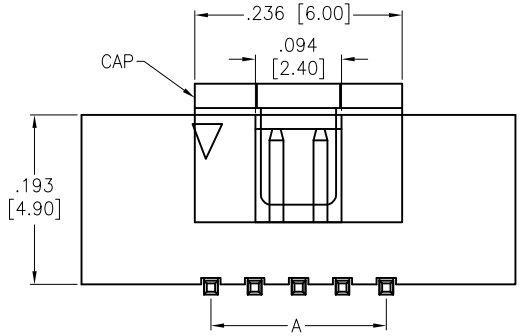

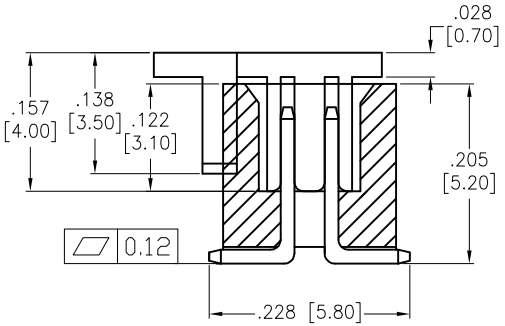

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 1 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 04 thru 100

A = .050 [1.27] x No. of Spaces

B = .050 [1.27] x No. of Positions per Row + .177 [4.50]

C = .050 [1.27] x No. of Positions per Row + .244 [6.20]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	9/7/18
CHECKED	RT	9/7/18
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .050" x .050" BOX HEADER, VERTICAL, SMT, GOLD PLATED, TAPE & REEL

SIZE	PART NO.	REV.
X	HBHR-B3-XX-VG-SMT-PP-T/R	B

REF: S00111C | SCALE: NTS | SHEET 1 OF 1