

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/1/20	


APPROVED: _____

DATE: _____ TITLE: _____

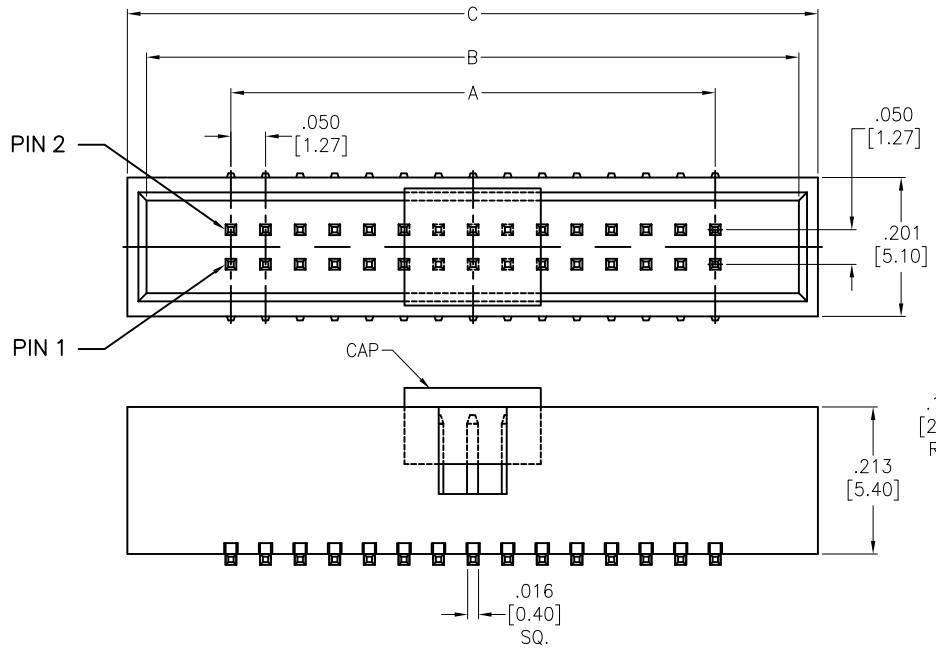

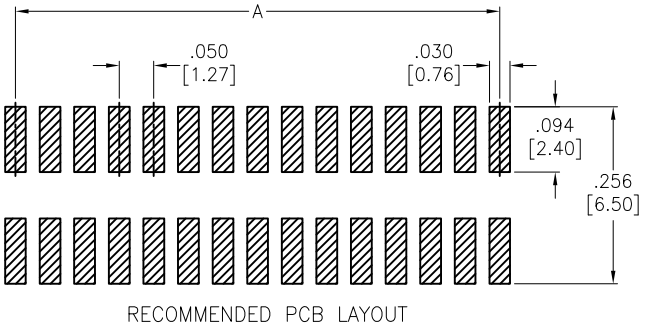

RECOMMENDED PCB LAYOUT



SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1.0 Amps/contact max
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

A = .050 [1.27] x No. of Spaces
B = .050 [1.27] x No. of Positions per Row + .193 [4.90]
C = .050 [1.27] x No. of Positions per Row + .248 [6.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/1/20
CHECKED	RL	7/1/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.050" x .050" BOX HEADER, VERTICAL,
SMT, GOLD FLASH PLATED, TAPE & REEL

SIZE	PART NO.	REV.
X	HBHR-B5-XX-VG-SMT-PP-T/R	-

REF: S00145C | SCALE: NTS | SHEET 1 OF 1