


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/23/22	


APPROVED: _____

DATE: _____ TITLE: _____

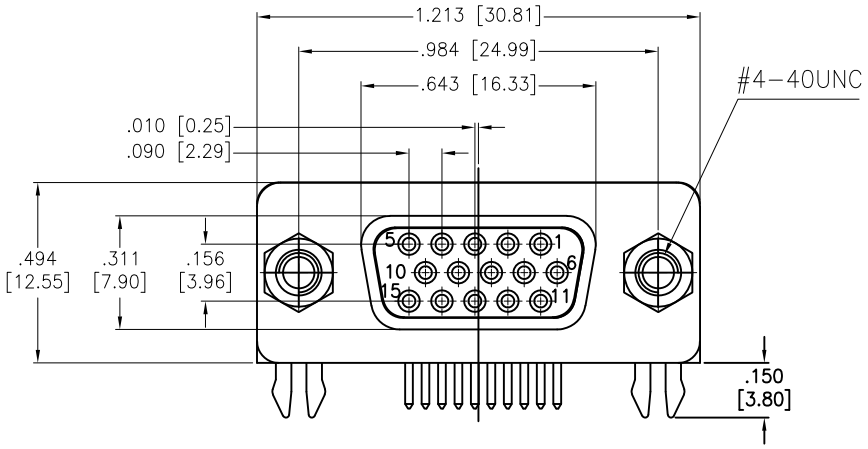



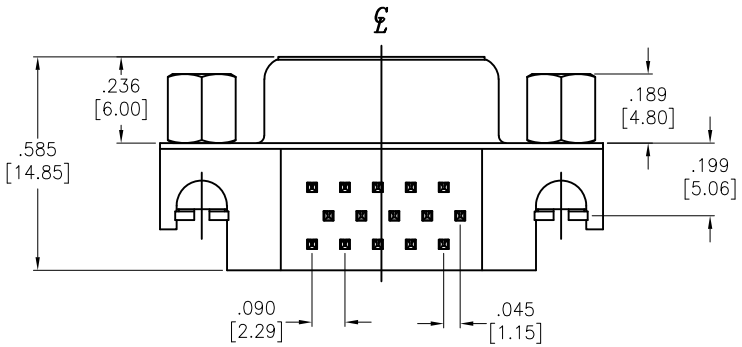

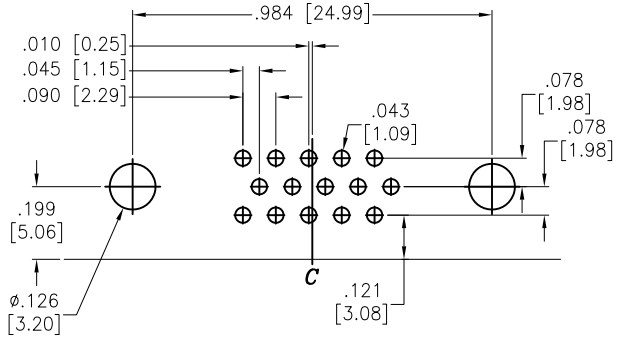

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: (LCP) Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: SPCC, Nickel plated
Boardlock: Copper Alloy, Tin plated
Rivet: Copper Alloy, Nickel plated
Screw: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on PCB tails
Electrical:
Voltage: 250 VAC(RMS) max
Current Rating: 3 Ampere per Contact
Contact resistance: 25 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC (RMS)
Temperature Rating:
Operating temperature: -55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Deca BDE-free Halogen-free

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	JJ	5/23/22
CHECKED	JC	5/23/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .197 [5.00] SLIMLINE D-SUB SOCKET FORKED BOARDLOCKS, #4-40 JACKSCREWS

SIZE	PART NO.	REV.
X	HD15-SN-25-HF-HT	-

REF: S00027T | SCALE: NTS | SHEET 1 OF 1