
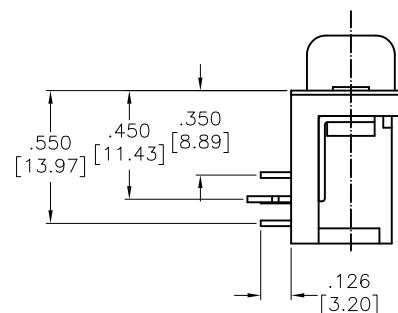
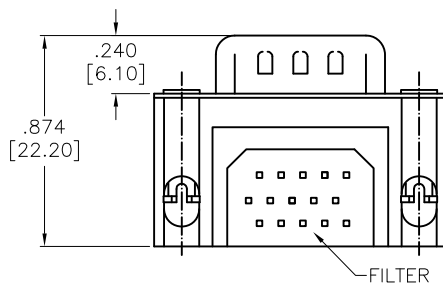


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/6/05	
A		UPDATE DRAWING	3/30/17	AY/CT

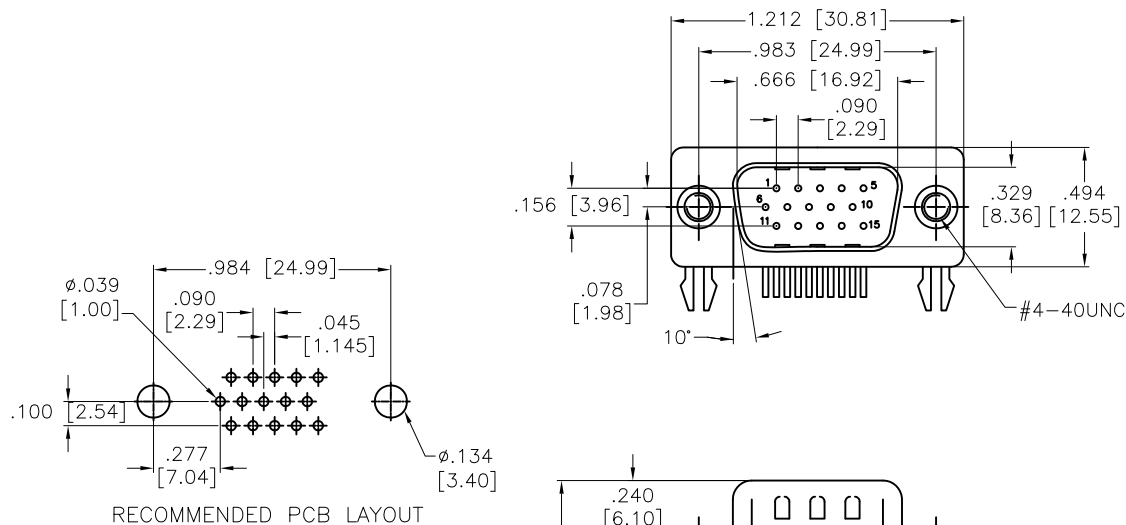

SPECIFICATIONS:

Material:

Insulator: PBT, Glass Filled, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Steel, Tin plated

Clinch Nut: Brass, Nickel plated

Boardlock: Steel, Tin plated

Plating:

Gold flash over Nickel underplate on contact area

Electrical:

Voltage rating: 250 VAC/rms

Current rating: 3 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC/rms for 1 minute

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS DATE

DRAWN SS 5/6/05

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
15 POS. HIGH DENSITY D-SUB PLUG, EMI
#4-40 INSERTS & FORKED BOARDLOCKS

SIZE X PART NO. HDL15-PL-B-EMI REV. A

REF: S00087T SCALE: NTS SHEET 1 OF 1