

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/10/05	
A		REDRAWN	4/11/11	

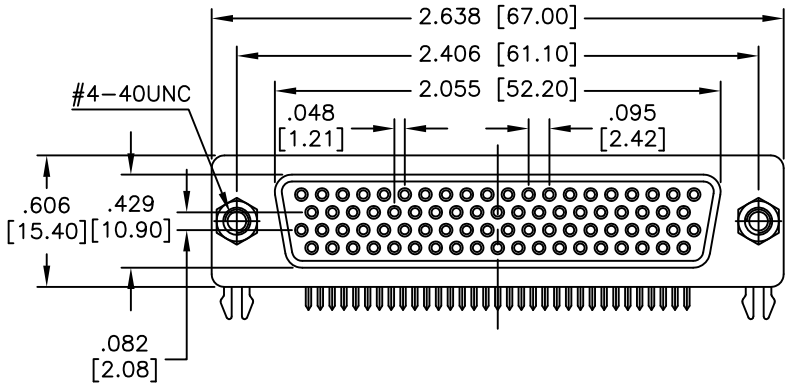

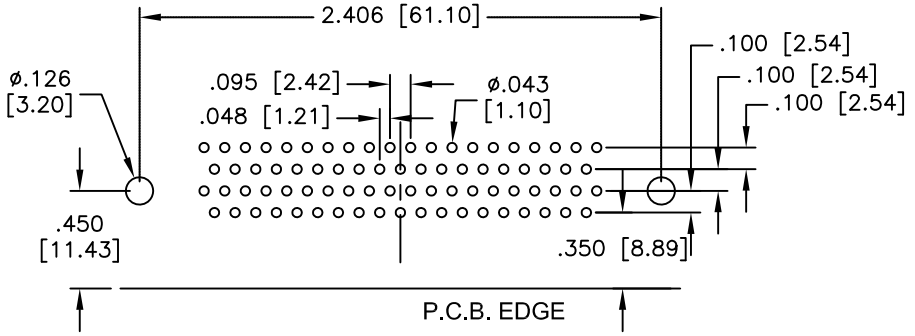

RECOMMENDED P.C.B. LAYOUT

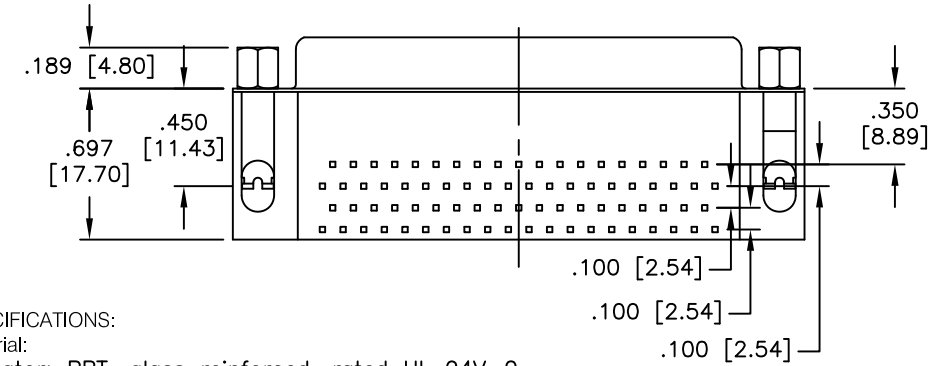



SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V–0

Insulator color: Black

Contacts: Copper Alloy

Shell: SPCC, Nickel plated

Boardlock: Copper Alloy, Tin plated

Rivet: Copper Alloy, Nickel plated

Screw: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on solder area.

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps per contact

Contact resistance: 25 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: –55°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	5/10/05
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HIGH DENSITY D-SUB SOCKET, 78P, R/A
#4-40 JACKSCREWS & BOARDLOCKS

SIZE	PART NO.	REV.
X	HDL78-SL-A	A

REF: S00027T	SCALE: NTS	SHEET 1 OF 1