

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/7/13	
A		UPDATE SPEC.	5/12/20	AY/DH
B		UPDATE DRAWING	12/2/24	LH/MC

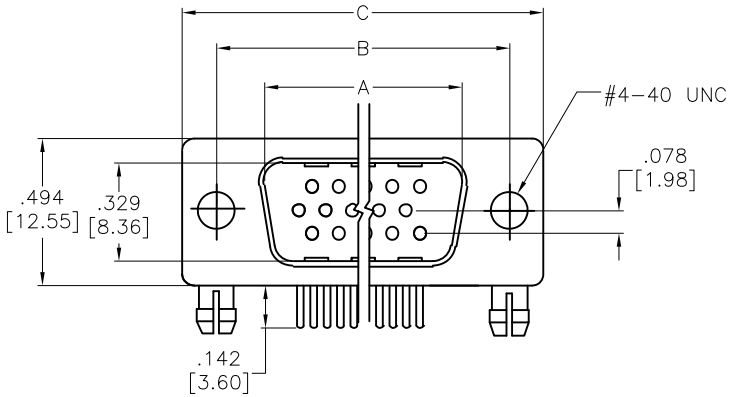

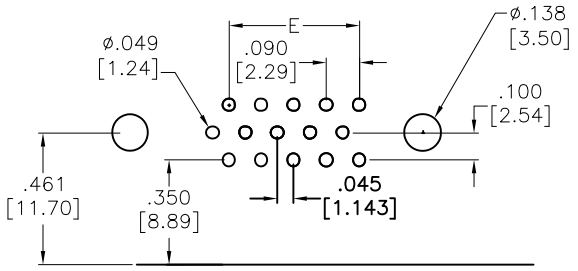

RECOMMENDED PCB LAYOUT

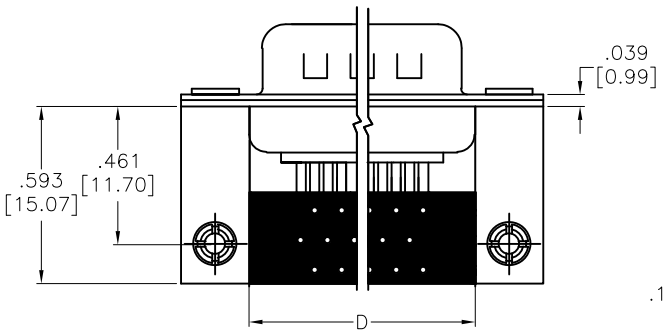

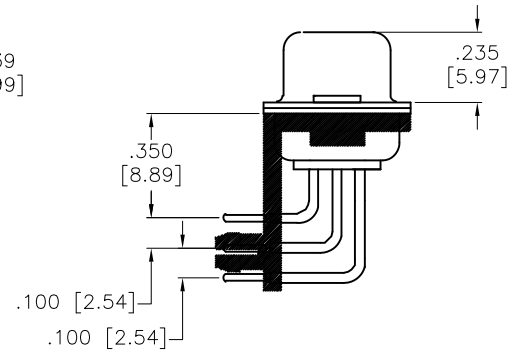

HDLXX	DIMENSIONS				
	A	B	C	D	E
15	.666 [16.92]	.984 [24.99]	1.213 [30.81]	.759 [19.28]	.361 [9.16]
26	.994 [25.25]	1.312 [33.32]	1.541 [39.14]	1.083 [27.51]	.721 [18.32]
44	1.534 [38.96]	1.852 [47.04]	2.088 [53.04]	1.625 [41.28]	1.262 [32.06]

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Shell: Steel, Tin over nickel plated
Metal Bracket: Steel, Nickel plated
Boardlock: Brass, Nickel plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 5 Amp
Contact resistance: 10 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +125°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	11/7/13
CHECKED	YC	11/7/13
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.350 [8.89] FOOTPRINT D-SUB,HIGH DENSITY
METAL BRACKETS, #4-40UNC THREADED HOLES

SIZE	PART NO.	REV.
X	HDLXX-PH-H2AM-HT	B

REF: S00019T | SCALE: NTS | SHEET 1 OF 1