

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/16	


APPROVED: _____

DATE: _____ TITLE: _____

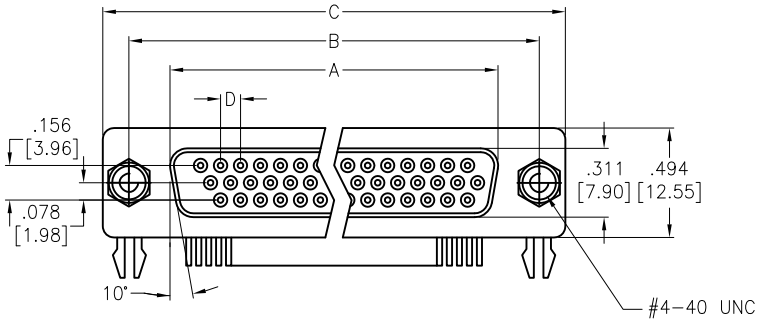


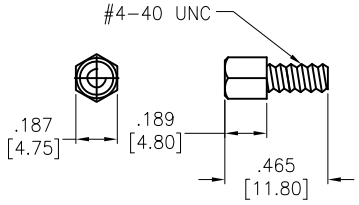



#4-40 unc screwlock installed

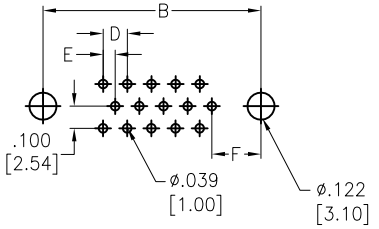

15 POSITION
RECOMMENDED PCB LAYOUT

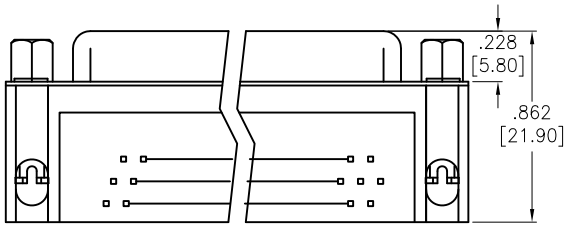

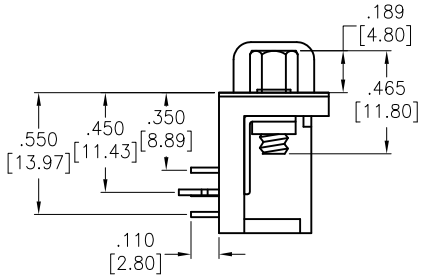

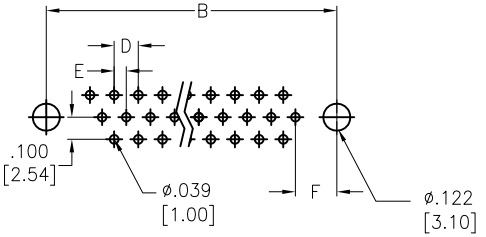

26,44,62 POSITION
RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: SPCC
Clinch Nut: Brass, Nickel plated
Boardlock: Brass, Nickel plated
Screwlock: Brass, Nickel plated
Plating:
30u" Gold over Nickel underplate on contact area
Electrical:
Operating voltage: 250 VAC max
Current rating: 1 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

HDTXX	DIMENSIONS					
	A	B	C	D	E	F
15	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.118 [2.29]	.045 [1.145]	.277 [7.04]
26	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	.118 [2.29]	.045 [1.145]	.271 [6.88]
44	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	.118 [2.29]	.045 [1.145]	.271 [6.88]
62	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]	.095 [2.41]	.047 [1.205]	.276 [7.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/1/16
CHECKED	IC	4/1/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HIGH DENSITY D-SUB SOCKET, R/A
#4-40 INSERTS & FORKED BOARDLOCKS

SIZE	PART NO.	REV.
X	HDLXX-SL-C-30	-

REF: S00087T | SCALE: NTS | SHEET 1 OF 1