


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/10	


APPROVED: _____


DATE: _____ TITLE: _____

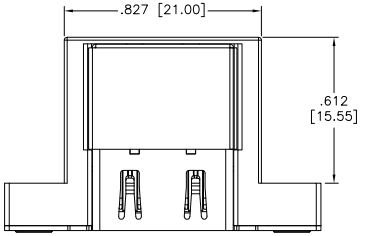

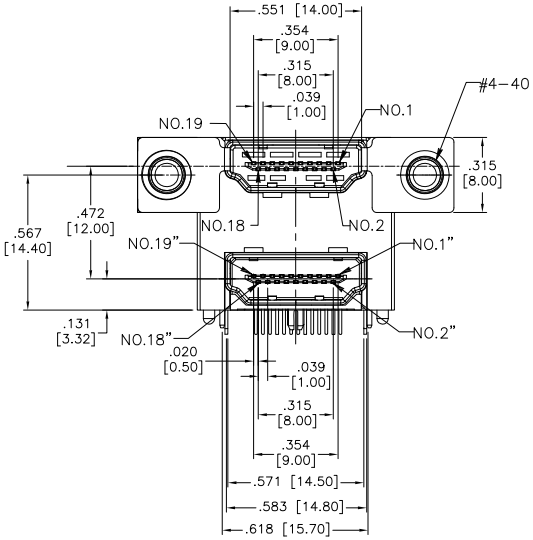






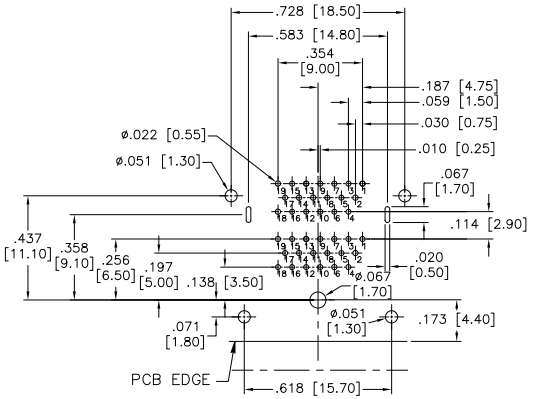

RECOMMENDED PCB LAYOUT

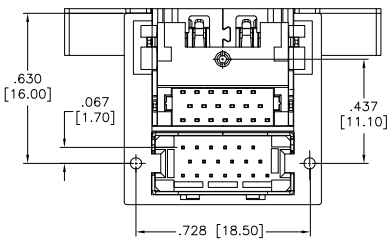

SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Copper Alloy
Shield: Copper Alloy, Tin plated over Nickel
Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on tails.
Electrical:
Current rating: 0.5A
Dielectric strength: 500VAC for 1 minute min.
Insulation resistance: 100 Megohm min @ 500V DC
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS Compliant
Recommended soldering temp: 260°C for 5 seconds.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	11/16/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL HDMI STACKED CONNECTOR THROUGH HOLE TYPE

SIZE	PART NO.	REV.
X	HDMI-D-RA-1-MF	-

REF:	SCALE:	SHEET
S000176T	NTS	1 OF 1