


APPROVED: _____

DATE: _____ TITLE: _____


| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 4/23/15 | |
| A | | UPDATE DIM. | 4/28/15 | AY/SY |
| B | | UPDATE SHELL SPEC. | 3/30/17 | AY/SY |

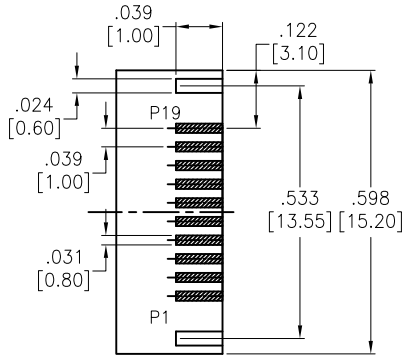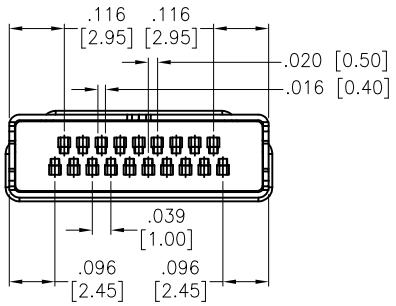


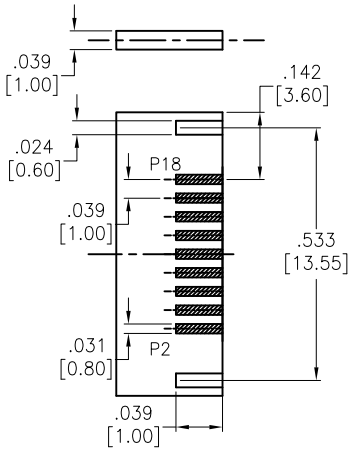







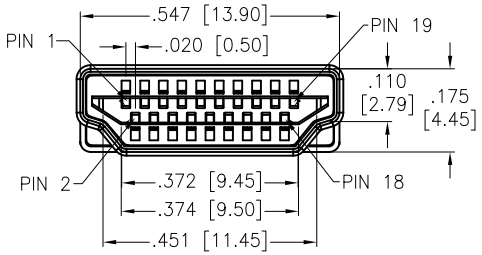

RECOMMENDED PCB LAYOUT



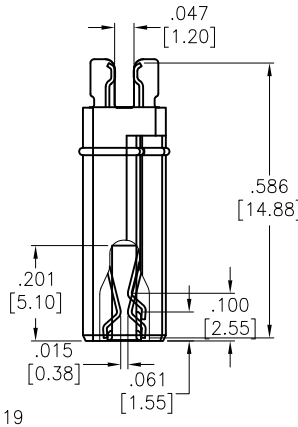




SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL94V-0
Insulator color: Black
Contact: Brass
Shell: Brass, Gold plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Voltage rating: 40 VAC (r.m.s) max.
Current rating: 0.5 Amp max
Contact resistance: 10 mohms max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | HR | 4/23/15 |
| CHECKED | SY | 4/23/15 |
| APPROVED | | |

**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
HDMI MALE CONNECTOR , A TYPE MALE,
STRADDLE MOUNT FOR .039 [1.00] PCB THICKNESS

| SIZE | PART NO. | REV. |
|---|---|---|
| X | HDMI-PLUG-OM7 | B |

REF: S00257T | SCALE: NTS | SHEET 1 OF 1