


Rev	AWO #	Description	Date	Appr
-		RELEASED	03/18/05	

APPROVED: _____


DATE: _____ TITLE: _____

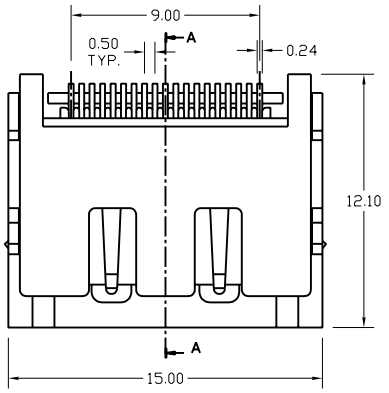




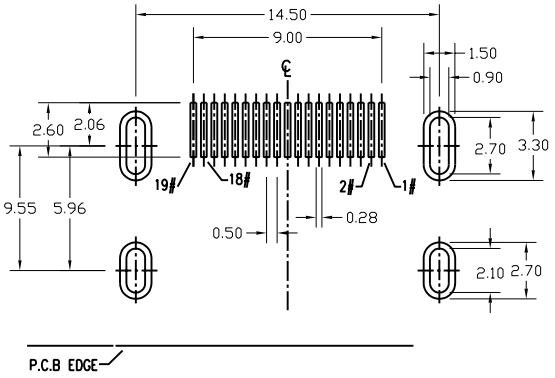


P.C.B LAYOUT

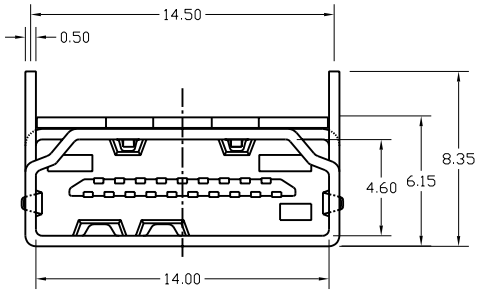

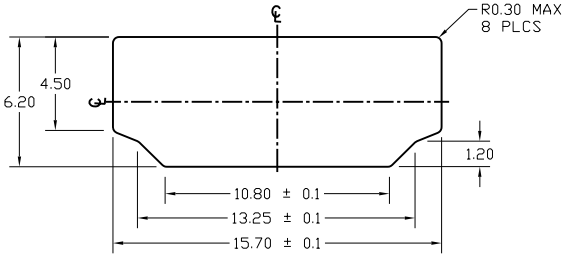

REFERENCE PANEL CUT OUT DIMENSION

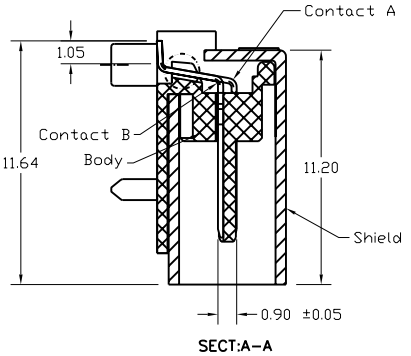

SECT:A-A

SPECIFICATIONS:
Material:
Insulator: LCP, glass reinforced, rated UL 94V-0
Insulator color: Black
Shield: Brass, Tin plate over Nickel underplate
Contacts: Brass
Plating:
Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails
Electrical:
Operating voltage: 40 VDC max.
Current rating: 0.5 Amps max.
Contact resistance: 30 mohms max.
Insulation resistance: 2000 Mohms min.
Dielectric withstanding voltage: 1200 VAC for 1 minute
Temperature Rating:
Operating temperature: -20°C to +85°C
Environmental:
Lead free, RoHS compliant.
Recomended soldering temp: 260° for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	03/18/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, 19 POS, RIGHT ANGLE SURFACE MOUNT, NO FLANGE

SIZE	PART NO.	REV.
X	HDMI-S-R-NF-SMT	-

REF: | SCALE: NTS | SHEET 1 OF 1