

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/23/12	


APPROVED: _____


DATE: _____ TITLE: _____

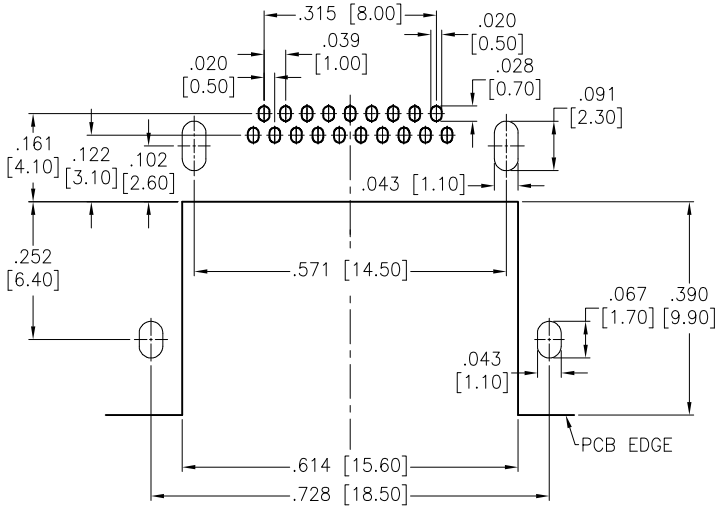


RECOMMENDED PCB LAYOUT

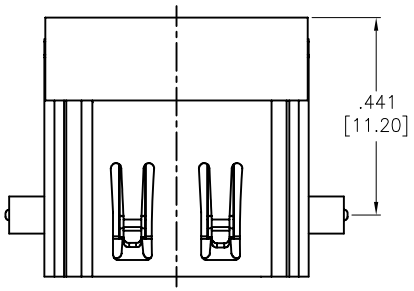

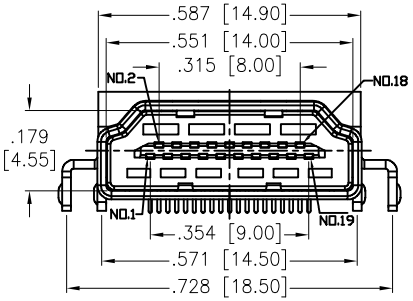

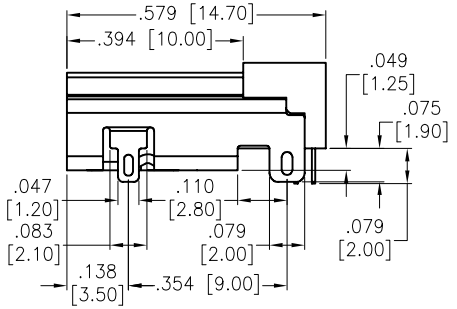

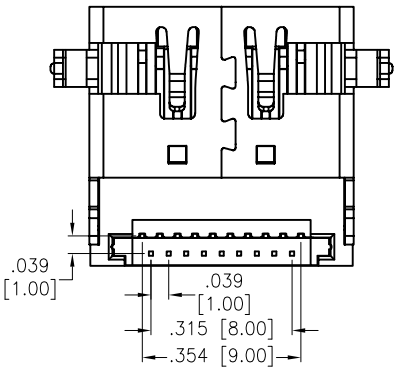

SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Copper Alloy
Shield: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on tails.
Electrical:
Operating voltage: 40 VAC max
Current rating: 1.5 Amps max
Contact resistance: 30 mohms max
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS Compliant
Recommended soldering temp: 260°C for 5 seconds.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/23/12
CHECKED	CC	2/23/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE DIP ASSEMBLY

SIZE	PART NO.	REV.
X	HDMI-S-RA-1-RF-02	-

REF:	SCALE:	SHEET
S00106T	NTS	1 OF 1