

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/19/18	
A		UPDATE DRAWING	7/17/20	AY/RC


APPROVED: _____


DATE: _____ TITLE: _____

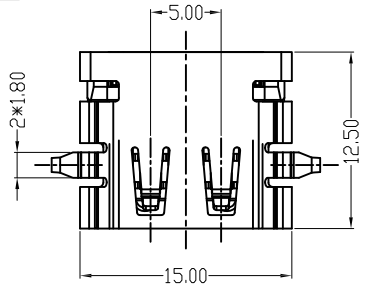


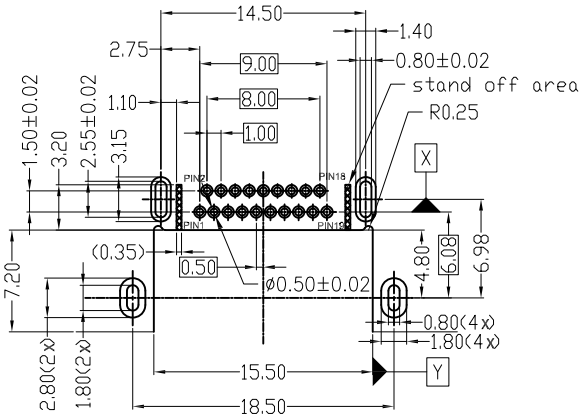


RECOMMENDED PCB LAYOUT

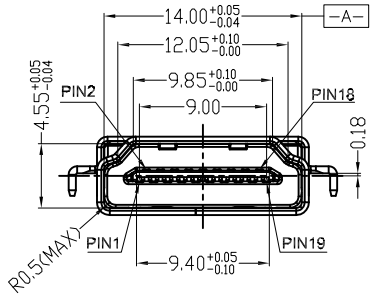





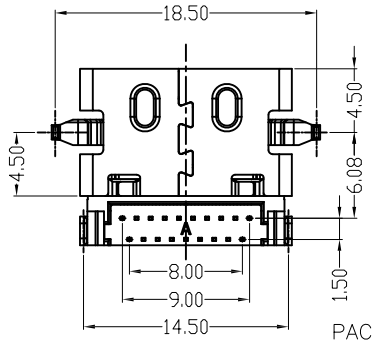

PACKAGED ON TAPE & REEL

SPECIFICATIONS:
Material:
Housing: Hi−temp thermoplastic, UL 94V−0
Housing color: Black
Contact: Copper Alloy
Shell: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails
Electrical:
Voltage rating: 40V
Current rating: 0.5A
Contact resistance: 10 mohms max.
Insulation resistance: a, unmated: 100 Megohm min @ 500 VDC.
b, mated: 10 Megohm min @ 150 VDC.
Dielectric withstanding voltage: 300 VAC for 1 minute
Temperature Rating:
Operating temperature: −20°C to +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM		ANGLE	
X.	± 0.30	X°	±2°
.X	± 0.25	.X°	±1.5°
.XX	± 0.20		

APPROVALS		DATE
DRAWN	AY	6/19/18
CHECKED	MY	6/19/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE DIP ASSEMBLY, TAPE & REEL

SIZE	PART NO.	REV.
X	HDMI-S-RA-1-RF-05-T/R	A

REF: S00015C | SCALE: NTS | SHEET 1 OF 1