


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/04/10	
A		UPDATED DRAWING	2/12/15	HR/YC

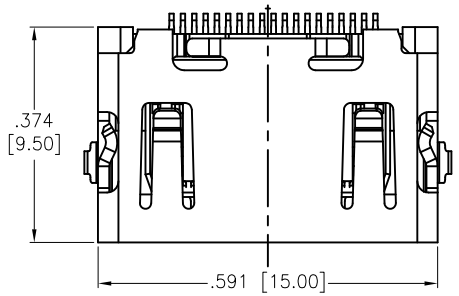


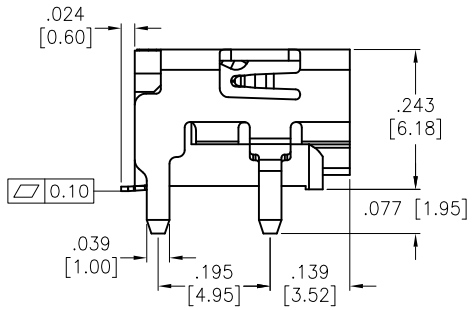

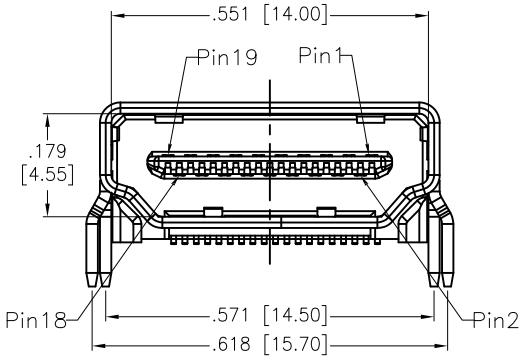

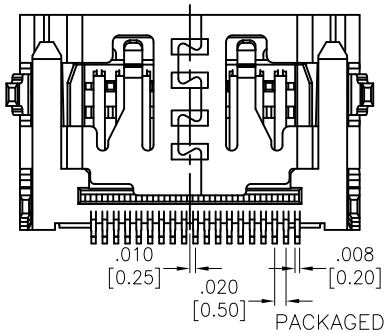

PACKAGED ON TAPE & REEL

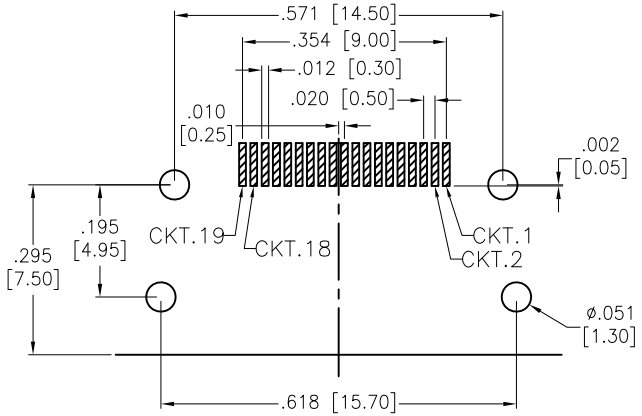

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Brass
Shield: Brass, Nickel plated
Plating:
Gold over Nickel underplate on contact area,
Matte Tin over Copper underplate on tails.
Electrical:
Voltage rating: 40 V
Current rating: 0.5 A
Contact resistance: 10 mohms max
Insulation resistance: 100 Mohms min @ 500 VDC (Unmated)
10 Mohms min @ 150 VDC (Unmated)
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/04/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
HDMI CONNECTOR, RIGHT ANGLE, SMT

SIZE	PART NO.	REV.
X	HDMI-S-RA-SMT-01-T/R	A

REF:	SCALE:	SHEET
S00015C	NTS	1 OF 1