


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/8/18	


APPROVED: _____

DATE: _____ TITLE: _____

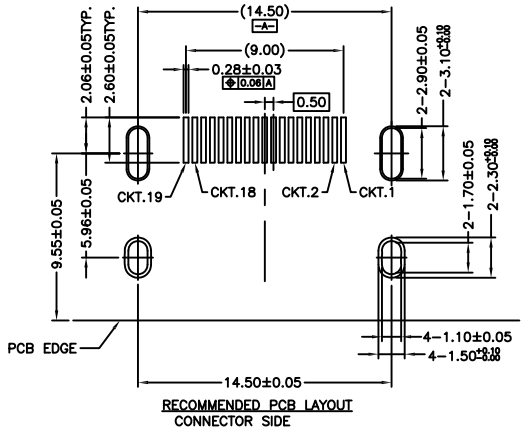

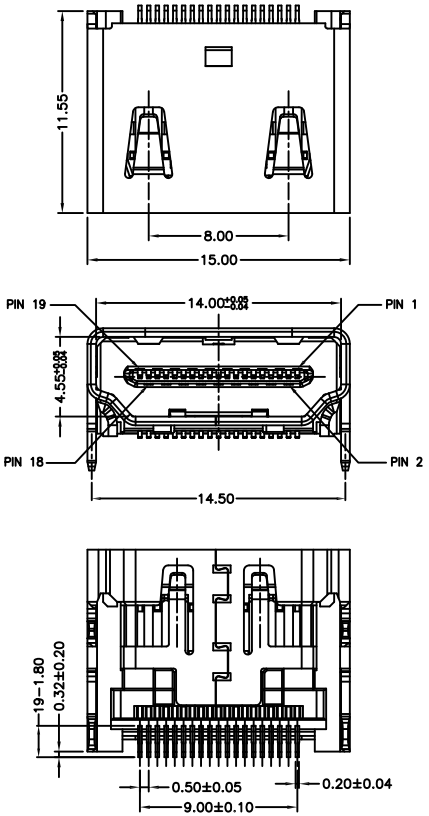





SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Copper Alloy
Shield: SPCC, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area,
Matte Tin over Nickel underplate on solder tails.
Electrical:
Voltage rating: 40V
Current rating: 0.5A
Contact resistance: 10 mohms max
Insulation resistance: UNMATED: 100 Mohms min @ 500 VDC
MATED: 10 Mohms min @ 150 VDC
Dielectric withstanding voltage: 300 VAC for 1 minute
Temperature Rating:
Operating temperature: -20°C to +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM		HOLES	
.X	± 0.25	X°	±2°
.XX	± 0.20	.X°	±1.5°
.XXX	± 0.15		

APPROVALS		DATE
DRAWN	AY	5/8/18
CHECKED	RT	5/8/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
HDMI CONNECTOR, RIGHT ANGLE, SMT

SIZE	PART NO.	REV.
X	HDMI-S-RA-SMT-03A-T/R	-

REF:	SCALE:	SHEET
S00005C	NTS	1 OF 1