

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/01/10	


APPROVED: _____


DATE: _____ TITLE: _____

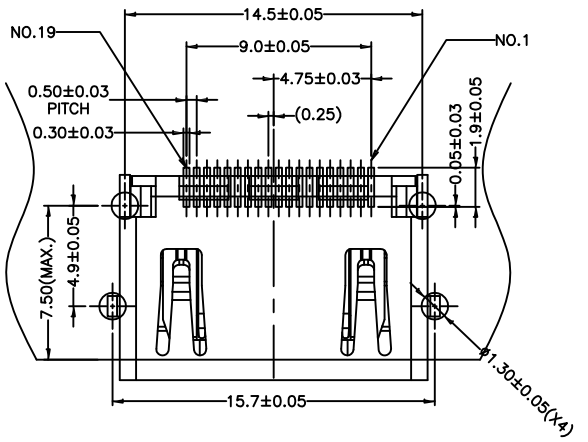



RECOMMENDED PCB LAYOUT (THICKNESS=1.6±0.15mm)



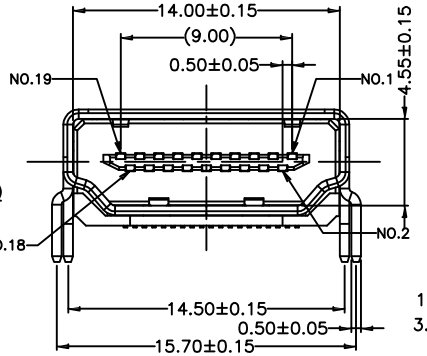


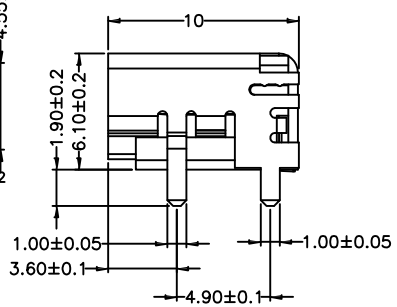



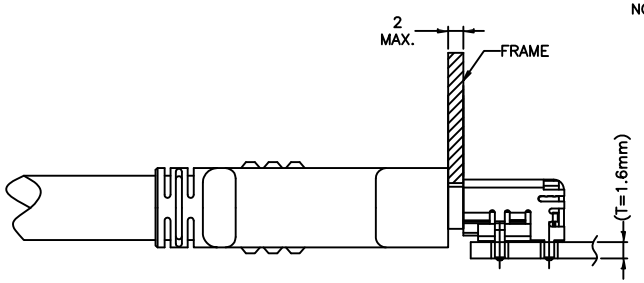

REFERENCE MOUNT DIMENSION

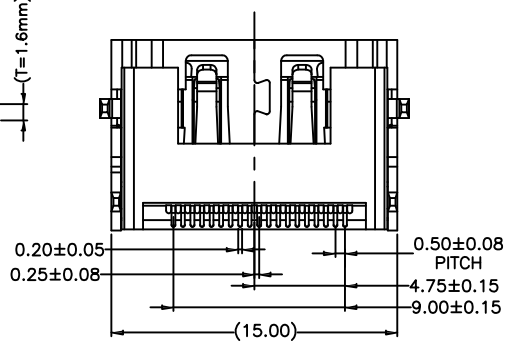

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Copper Alloy

Shield: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Dielectric strength: 300VAC for 1 minute min.

Insulation resistance: 100 Megohm min.

Contact resistance: 10 mohms max.

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	7/01/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE, SMT

SIZE	PART NO.	REV.
X	HDMI-S-RA-SMT-04-T/R	-

REF: S00106T | SCALE: NTS | SHEET 1 OF 1