

Rev	AWO #	Description	Date	Appr
-		RELEASED	09/15/15	


APPROVED: _____


DATE: _____ TITLE: _____

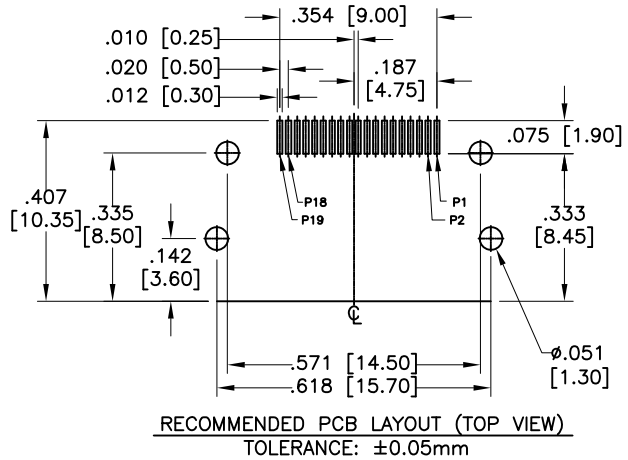


RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05mm

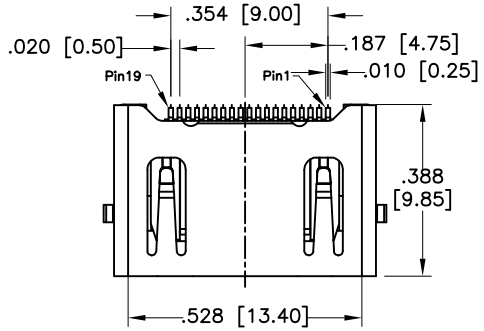



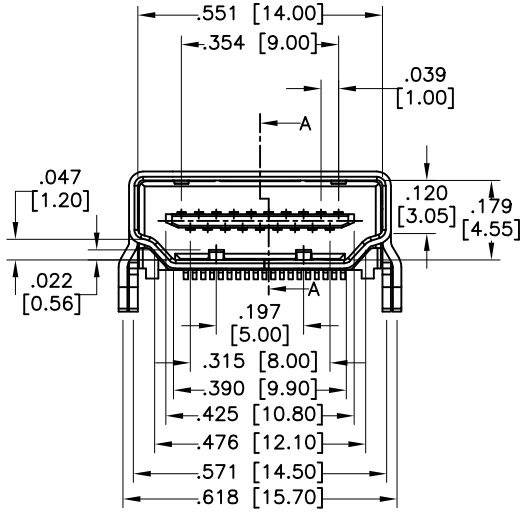

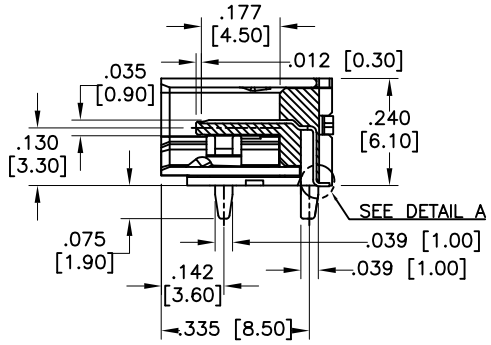

SECTION A–A

SPECIFICATIONS:
Material:
Housing: Hi–temp thermoplastic, UL 94V–0
Housing color: Black
Contact: Brass
Shield: Brass, Nickel plated
Plating:
30u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.
Electrical:
Current rating: 0.5A
Contact resistance: 30 mohms max.
Insulation resistance: 100 Megohm min.
Dielectric withstanding voltage: 300 VAC for 1 minute
Temperature Rating:
Operating temperature: –20°C o +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	09/15/15
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE SINGLE, SMT TYPE, 30u" GOLD

SIZE	PART NO.	REV.
X	HDMI-S-RA-SMT-07-30-T/R	-

REF: S00097C | SCALE: NTS | SHEET 1 OF 1