


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/4/10	
A		REVISED DIM.	7/4/11	
B		REDRAWN	12/22/12	
C		UPDATED DRAWING	7/19/18	HR/MY
D		UPDATED DRAWING	6/24/19	AY/IW



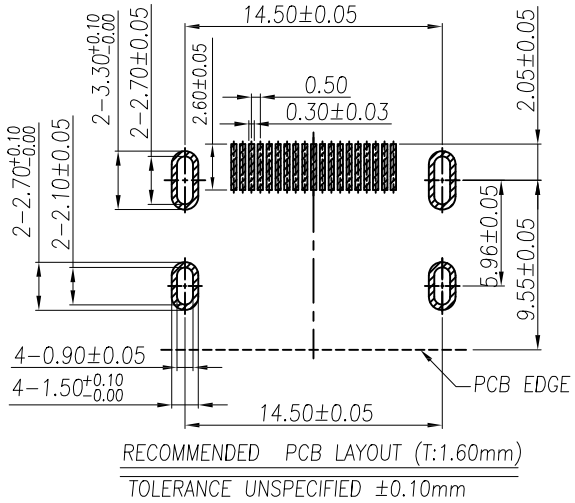

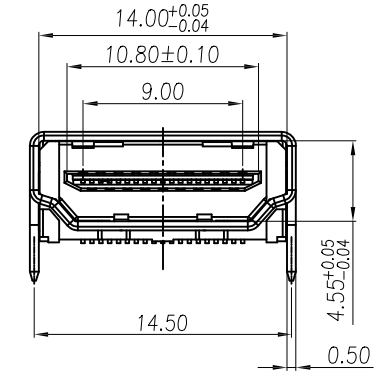

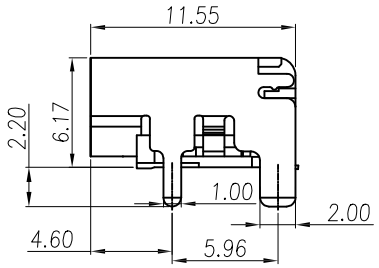



PACKAGED ON TAPE & REEL

SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Brass
Shell: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate on Contact area,
Matte Tin over Nickel underplate on Solder tails.
Electrical:
Voltage rating: 40 V
Current rating: 0.5 A
Contact resistance: 30 mohms max.
Insulation resistance: 100 Megohm min.
Temperature Rating:
Operating temperature: -20°C to +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM		HOLES	
X.X	± 0.25	X°	±1.5°
X.XX	± 0.15	.X°	±1.0°
X.XXX	± 0.10	.XX°	±0.5°

APPROVALS		DATE
DRAWN	AY	11/4/10
CHECKED	AH	11/4/10
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE SMT TYPE, HEADER ASSEMBLY

SIZE	PART NO.	REV.
X	HDMI-S-RA-SMT-A-T/R	C

REF:	SCALE:	SHEET
S00161C	NTS	1 OF 1