


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/09/10	
A		REDRAWN	07/02/12	
B		REVISED SHAPE	7/30/14	AY/AC


APPROVED: _____

DATE: _____ TITLE: _____

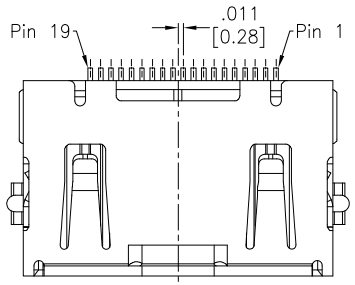


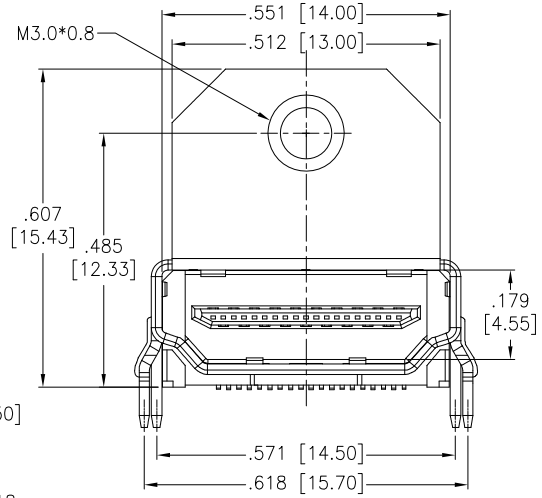

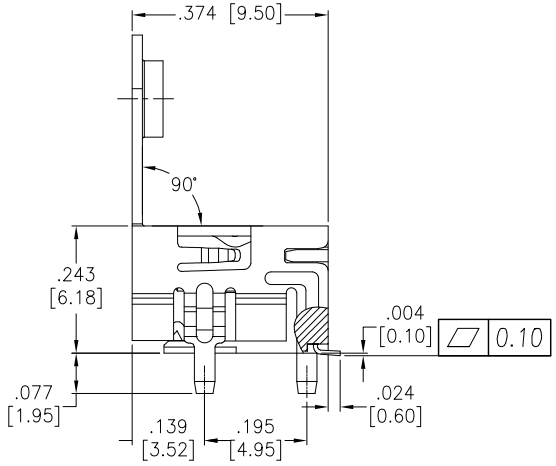

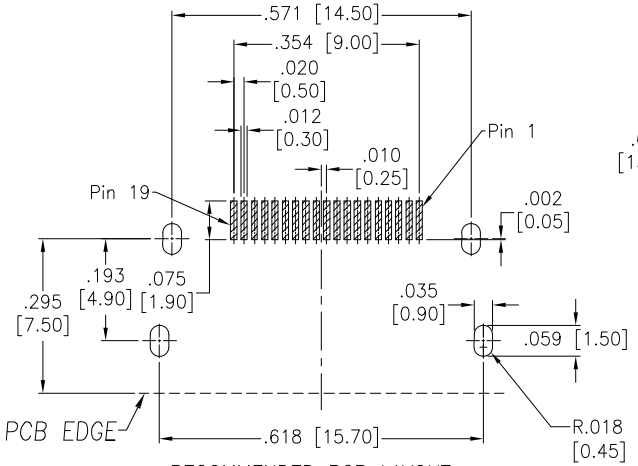

RECOMMENDED PCB LAYOUT
TOLERANCE UNSPECIFIED ±.004" [±0.10mm]

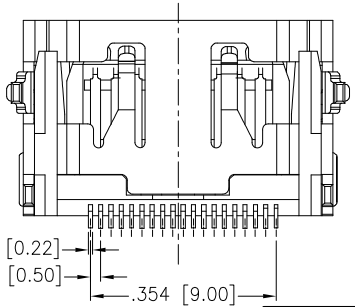

SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Copper Alloy
Shield: Copper Alloy
Plating:
15u" Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails.
Electrical:
Voltage rating: 40V
Current rating: 0.5A
Contact resistance: 30 mohms max.
Insulation resistance: 100 Megohm min.
Temperature Rating:
Operating temperature: -20°C to +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/09/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR WITH MOUNTING FLANGE
RIGHT ANGLE, SMT TYPE, 15u" SEL-GOLD

SIZE	PART NO.	REV.
X	HDMI-S-RA1-SMT-02-MF-15	B

REF: S00075C | SCALE: NTS | SHEET 1 OF 1