
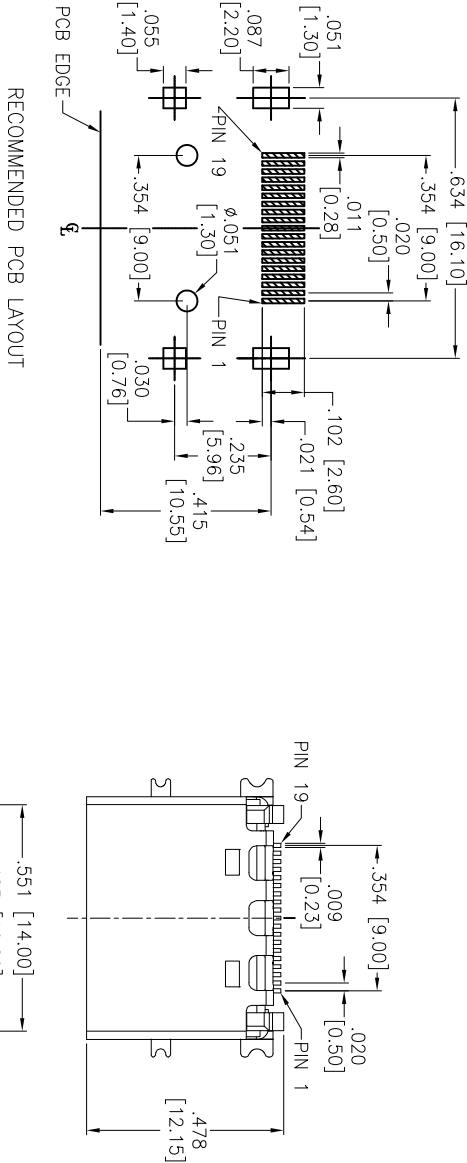


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/14/14	
A		REVISED DIM.	6/20/14	AY/NP
B		REDRAWN	10/17/14	HR/AC
C		UPDATE SHAPE	11/18/14	AY/AC

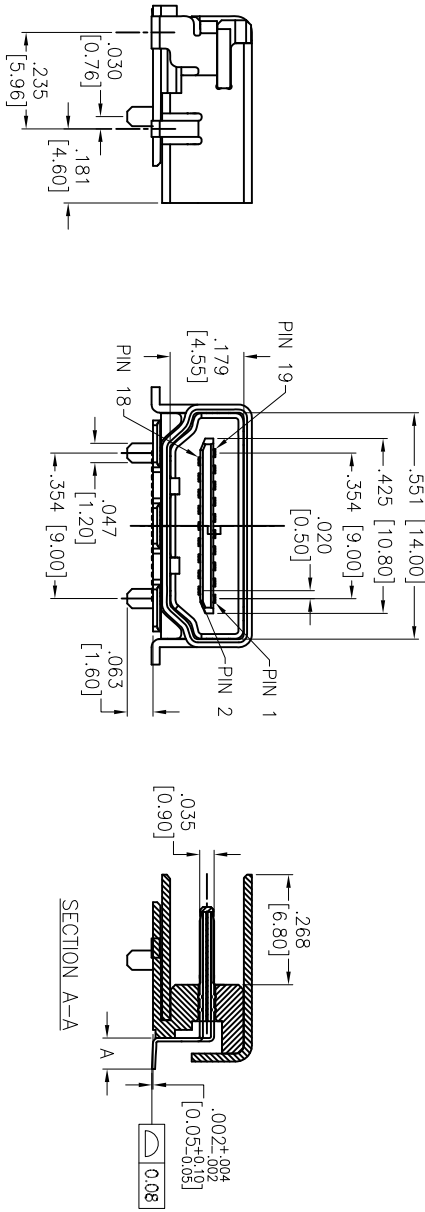

SPECIFICATIONS:

Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Shell: SPCC, Gold flash plated
Plating: Gold flash over Nickel underplate on contact area, Tin over Nickel underplate on Solder tails.

Electrical:
Operating voltage: 40 VAC max
Current rating: 0.5 Amp Max.
Contact resistance: 10 mohms max
Insulation resistance: 100 Mohms min @ 500 VDC (UNMATE)
10 Mohms min @ 150 VDC (MATE)
Dielectric withstanding voltage: 500 VAC for 1 minute (UNMATE)
300 VAC for 1 minute (MATE)
Temperature Rating: Operating temperature: -55°C to +85°C
Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

HDMI CONNECTOR, RIGHT ANGLE,
SURFACE MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	AY		5/14/14	CHECKED	NP		5/14/14	APPROVED			
TITLE				SIZE				PART NO.			
HDMI CONNECTOR, RIGHT ANGLE, SURFACE MOUNT				X				HDMI-S-RA6-TSMT			
REF: S00097C				SCALE: NTS				SHEET 1 OF 1			
								REV. C			