

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/15	
A		UPDATED DIM.	3/27/17	HR/DH
B		UPDATE DRAWING	5/9/17	AY/DH
C		UPDATE TEMPERATURE	1/11/22	LH/LW








WITHOUT COVER

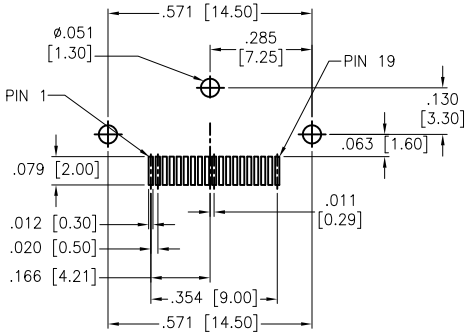

RECOMMENDED PCB LAYOUT





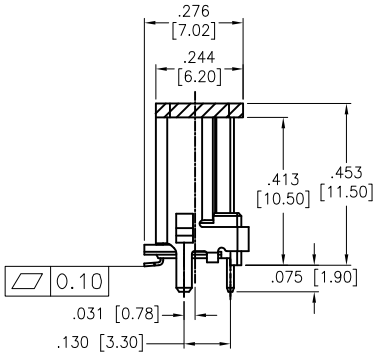

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, Glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shield: Copper Alloy, Nickel plated

Plating:

5u" Gold over Nickel underplate on contact area,
Matte Tin over Nickel underplate on PCB tails

Electrical:

Operating voltage: 40V

Current rating: 0.5A

Contact resistance: 10 mohms max

Insulation resistance: 100 Mohms min @ 500 VDC (Unmated)
10 Mohms min @ 150 VDC (Mated)

Dielectric withstanding voltage: 300 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C ⚠

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	HR	5/25/15
CHECKED	CH	5/25/15
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: HDMI RECEPTACLE, VERTICAL, W/ DUST COVER, TAPE & REEL

SIZE	PART NO.	REV.
X	HDMI-S-V-02-SMT-DC-T/R	C

REF: S00005C | SCALE: NTS | SHEET 1 OF 1